

# CE/EMC COMPLIANCE REPORT

for

CHIPSEE CO., LIMITED.

Embedded Industrial Computer

Prepared for : CHIPSEE CO., LIMITED.

Address : Xinyuan Science Park B406, 97 Changping Road,  
Changping District, Beijing, 102206, China

Prepared by : EST Technology Co., Ltd.

Address : Chilingxiang, Qishantou, Santun, Houjie, Dongguan,  
Guangdong, China

Tel: 86-769-83081888

Fax: 86-769-83081878

Report Number : ESTE-E2307037




Date of Report : Jul. 14, 2023



## TABLE OF CONTENTS

Test Report Declaration	Page
<b>1. GENERAL PRODUCT INFORMATION.....</b>	<b>4</b>
1.1. Product Function .....	4
1.2. Description of Device (EUT) .....	4
1.3. Difference between Model Numbers .....	4
1.4. Independent Operation Modes .....	4
1.5. Test Supporting System .....	4
<b>2. TEST SITES.....</b>	<b>5</b>
2.1. Description of Standards and Results.....	5
2.2. Test Facilities .....	6
2.3. List of Test and Measurement Instruments .....	7
<b>3. TEST SET-UP AND OPERATION MODES .....</b>	<b>9</b>
3.1. Principle of Configuration Selection.....	9
3.2. Block Diagram of Test Set-up.....	9
3.3. Test Operation Mode and Test Software.....	10
3.4. Special Accessories and Auxiliary Equipment .....	10
3.5. Countermeasures to Achieve EMC Compliance.....	10
<b>4. EMISSION TEST RESULTS.....</b>	<b>11</b>
4.1. Asymmetric Mode Conducted Emissions Test .....	11
4.2. Radiated Emission Test.....	14
4.3. Radiated Emission Test (above 1GHz) .....	35
<b>5. IMMUNITY TEST RESULT .....</b>	<b>56</b>
5.1. Description of Performance Criteria: .....	56
5.2. Electrostatic Discharge Immunity Test .....	57
5.3. Radio Frequency Electromagnetic Field Immunity(R/S) Test.....	59
5.4. Electrical Fast Transient/Burst Immunity Test .....	62
5.5. Surge Immunity Test.....	64
5.6. Injected Currents Susceptibility Test .....	66
5.7. Power Frequency Magnetic Field Immunity Test.....	68
<b>6. PHOTOGRAPHS OF TEST SET-UP .....</b>	<b>69</b>
6.1. Set-up for Asymmetric Mode Conducted Emissions Test .....	69
6.2. Set-up for Radiated Emission Test.....	70
6.3. Set-up for Radiated Emission Test(above 1GHz) .....	71
6.4. Set-up for Electrostatic Discharge Immunity Test .....	72
6.5. Set-up for Radio Frequency Electromagnetic Field Immunity(R/S) Test.....	72
6.6. Set-up for Electrical Fast Transient/Burst Immunity Test .....	73
6.7. Set-up for Surge Immunity Test.....	73
6.8. Set-up for Power Frequency Magnetic Field Immunity Test.....	74
6.9. Set-up for Injected Currents Susceptibility Test .....	74
<b>7. PHOTOGRAPHS OF THE EUT .....</b>	<b>75</b>

# EST Technology Co., Ltd.

<b>Applicant:</b>	CHIPSEE CO., LIMITED.		
<b>Address:</b>	Xinyuan Science Park B406, 97 Changping Road, Changping District, Beijing, 102206, China		
<b>Manufacturer:</b>	CHIPSEE CO., LIMITED.		
<b>Address:</b>	Xinyuan Science Park B406, 97 Changping Road, Changping District, Beijing, 102206, China		
<b>Factory:</b>	CHIPSEE CO., LIMITED.		
<b>Address:</b>	Xinyuan Science Park B406, 97 Changping Road, Changping District, Beijing, 102206, China		
<b>E.U.T:</b>	Embedded Industrial Computer		
<b>Model Number:</b>	CS10600R070E, CS10600R070P		
<b>Trade Name:</b>	Chipsee	<b>Serial No:</b>	-----
<b>Date of Receipt:</b>	Jun. 05, 2023	<b>Date of Test:</b>	Jul. 08~12, 2023
<b>Test Specification:</b>	EN 55032:2015+A1:2020 EN 55035:2017+A11:2020		
<b>Test Result:</b>	The equipment under test was found to be compliance with the requirements of the standards applied.		
		<b>Issue Date:</b> Jul. 14, 2023	
<b>Prepared by:</b>	<b>Reviewed by:</b>	<b>Approved by:</b>	
			
Lena / Assistant	Sean / Engineer	Iceman Hu / Manager	
<b>Other Aspects:</b>			
None.			
Abbreviations: OK/P=passed    fail/F=failed    n.a/N=not applicable    E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd. The statement of compliance in this report is based on the limit in the test standard, the measurement uncertainty is not considered.			

# 1. GENERAL PRODUCT INFORMATION

## 1.1. Product Function

Refer to Technical Construction Form and User Manual.

## 1.2. Description of Device (EUT)

Description	: Embedded Industrial Computer
Model No.	: CS10600R070E, CS10600R070P
System Input Voltage	: DC 12V From Battery
DC Line	: Unshielded, Detachable 0.8m
HDMI Line	: Shielded, Detachable 1.5m

## 1.3. Difference between Model Numbers

Note: The products are only different the model number,  
But the PCB boards inside are identical.

## 1.4. Independent Operation Modes

The basic operation modes are:

1.4.1. TF Mode

1.4.2. Wi-Fi

1.4.3. USB Play

1.4.4. LAN

1.4.5. Bluetooth Mode

## 1.5. Test Supporting System

## 2. TEST SITES

### 2.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION(EN 55032:2015+A1:2020)				
Description of Test Item	Standard	Limits		Results
Conducted emissions (AC mains power ports)	EN 55032:2015+A1:2020	-----		N/A
		Minimum passing margin is ***dB at ***MHz		
Asymmetric mode conducted emissions	EN 55032:2015+A1:2020	Class A		PASS
		Minimum passing margin is 10.96dB at 23.14MHz		
Conducted differential voltage emissions	EN 55032:2015+A1:2020	-----		N/A
		More than *** dB below the limit line.		
Radiated Emission	EN 55032:2015+A1:2020	Class A		PASS
		Minimum passing margin is 3.81dB at 177.44MHz		
Radiated Emission Test (above 1GHz)	EN 55032:2015+A1:2020	Class A		PASS
		Minimum passing margin is 13.01dB at 2970MHz		
Harmonic current emissions	EN IEC 61000-3-2:2019+A1:2021	-----		N/A
Voltage fluctuations & flicker	EN 61000-3-3:2013+A1:2019+A2:2021	-----		N/A
IMMUNITY (EN 55035:2017+A11:2020)				
Description of Test Item	Basic Standard	Performanc e Criteria	Observation Criteria	Results
Electrostatic discharge (ESD)	EN 61000-4-2:2009	B	B	PASS
Radio-frequency,Continuous radiated disturbance	EN 61000-4-3:2006+A1:2008+A2:2010	A	A	PASS
Electrical fast transient (EFT)	EN 61000-4-4:2012	B	B	PASS
Surge (Input a.c. power port)	EN 61000-4-5:2014	B	B	PASS
Radio-frequency, Continuous conducted disturbance	EN 61000-4-6:2014	A	A	PASS
Power frequency magnetic field	EN 61000-4-8:2010	A	A	PASS
Voltage dips, >95% reduction	EN 61000-4-11:2004	B	*	N/A
Voltage dips, 30% reduction		C	*	N/A
Voltage interruptions		C	*	N/A
N/A is an abbreviation for Not Applicable.				

## 2.2. Test Facilities

EMC Lab :   Certificated by CNAS, CHINA  
Registration No.: L5288  
This Certificate is valid until: November 12, 2023

Certificated by FCC, USA  
Designation Number: CN1215  
This Certificate is valid until: January 31, 2024

Certificated by A2LA, USA  
Registration No.: 4366.01  
This Certificate is valid until: January 31, 2024

Certificated by Industry Canada  
CAB identifier No.: CN0035  
This Certificate is valid until: January 31, 2024

Certificated by VCCI, Japan  
Registration No.: C-14103; T-20073; R-13663;  
R-20103; G-20097  
Date of registration: Apr. 20, 2020  
This Certificate is valid until: Apr. 19, 2026

Certificated by TUV Rheinland, Germany  
Registration No.: UA 50413872 0001  
Date of registration: July 31, 2018

Certificated by Intertek  
Registration No.: 2011-RTL-L2-64  
Date of registration: November 08, 2018

Name of Firm :   EST Technology Co., Ltd.

Site Location :   Chilingxiang, Qishantou, Santun, Houjie, Dongguan,  
Guangdong, China

## 2.3.List of Test and Measurement Instruments

### 2.3.1. For asymmetric mode conducted emissions test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESRP3	EST-E070	June 12,23	1 Year
ISN	Teseq	T8	EST-E041	June 12,23	1 Year
Current Transformer	SCHWARZBECK	SW9605	EST-E045	June 12,23	1 Year
Voltage Probe	SCHWARZBECK	TK9420	EST-E046	June 12,23	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A

### 2.3.2. For radiated emission test (2# 966 radiation)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR3	EST-E049	June 12,23	1 Year
Bilog Antenna	Teseq	CBL 6111D	EST-E053	June 12,23	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A

### 2.3.3. For radiated emission test (above 1GHz )

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	June 12,23	1 Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	EST-E031	June 12,23	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A

### 2.3.4. For electrostatic discharge immunity test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
ESD Generator	Teseq	NSG437	EST-E073	June 12,23	1 Year

### 2.3.5. For electrical fast transient/burst immunity test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EFT Generator	EMC PARTNER	TRANSIENT 2000	EST-E074	June 12,23	1 Year
Capacitive Coupling Clamp	HAEFELY	IP4A	EST-E040	June 12,23	1 Year

### 2.3.6. Radio Frequency Electromagnetic Field Immunity (R/S) Test\

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Signal Generator	Agilent	N5181A	EST-E060	June 12,23	1 Year
Power Amplifier	SKET	HAP801000M-250W	EST-E061	N/A	N/A
Power Amplifier	SKET	HAP0103G-75W	EST-E062	N/A	N/A
Power Amplifier	SKET	HAP0306G-50W	EST-E063	N/A	N/A
Power Meter	Agilent	E4419B	EST-E064	June 12,23	1 Year
Power sensor	Agilent	E9301A	EST-E065	June 12,23	1 Year
Power sensor	HP	E9301A	EST-E066	June 12,23	1 Year
Antenna	Schwarzbeck	STLP 9129	EST-E059	N/A	N/A
E-Field Probe	Narda	EP-601	EST-E067	June 12,23	1 Year
Audio Analyzer	Rohde &Schwarz	UPV	EST-E024	June 12,23	1 Year
Test Software	SKET	EMC-S	V1.2.0.48	N/A	N/A

### 2.3.7. For surge immunity test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Surge Controller	HAEFELY	PSURGE8000	EST-E015	June 12,23	1 Year
Surge Impulse Module	HAEFELY	PIM100	EST-E016	June 12,23	1 Year
Surge Coupling Network	HAEFELY	PCD100	EST-E017	June 12,23	1 Year

### 2.3.8. For injected currents susceptibility test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Signal Generator	Rohde &Schwarz	SMB100A	EST-E025	June 12,23	1 Year
Power Amplifier	FRANKONIA	CIT-10	EST-E021	N/A	N/A
Power Meter	Rohde &Schwarz	NRVS	EST-E027	June 12,23	1 Year
Audio Analyzer	Rohde &Schwarz	UPV	EST-E024	June 12,23	1 Year
CDN	FRANKONIA	CDN-M2+M3	EST-E022	June 12,23	1 Year
EM-Clamp	FRANKONIA	EMCL-20	EST-E042	June 12,23	1 Year
Test Software	SKET	EMC-S	V1.2.0.80	N/A	N/A

### 2.3.9. For power frequency magnetic field immunity test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Magnetic Field Tester	HAEFELY	MFS 100	EST-E018	June 12,23	1 Year

Note: All calibration reports of the equipment were provided by LiSai calibration and Testing



### 3. TEST SET-UP AND OPERATION MODES

#### 3.1. Principle of Configuration Selection


**Emission:** The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

**Immunity:** The equipment under test (EUT) was configured to the representative operating mode and conditions.


#### 3.2. Block Diagram of Test Set-up

System Diagram of Connections Between EUT and Simulators

##### 3.2.1. For emission test

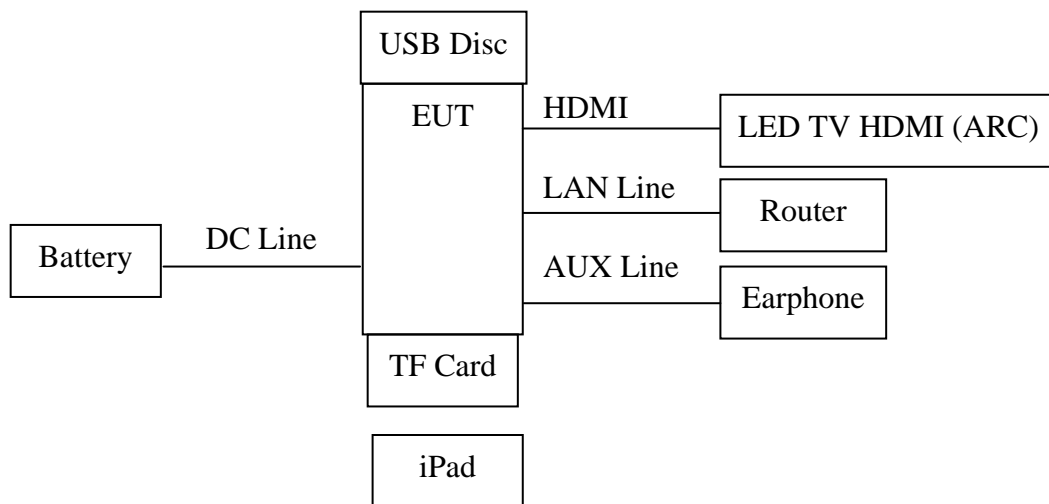

##### 3.2.2. For immunity test

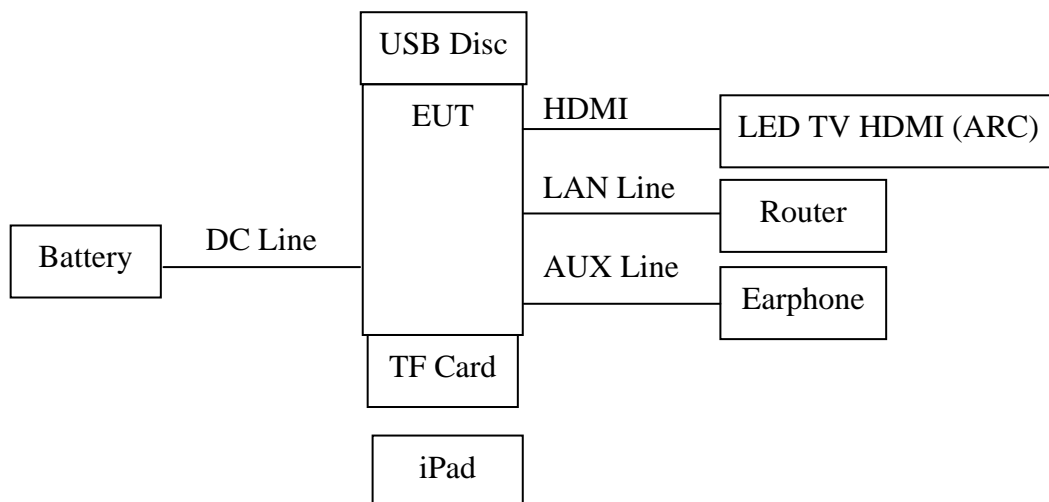

(EUT: Embedded Industrial Computer)

### 3.3. Test Operation Mode and Test Software

Refer to Test Setup in clause 4 & 5.

### 3.4. Special Accessories and Auxiliary Equipment

#### 3.4.1.U Disc

M / N : SDCZ7-4096  
S / N : BH0701AGOB  
Manufacturer : SanDisk

#### 3.4.2.Earphone

M / N : KDM-430  
Manufacturer : KEENION  
Data Cable : Unshielded, Undetachable, 1.6m

#### 3.4.3.Router

M / N : RT-AC66U  
S / N : G1ICGG000260  
Manufacturer : ASUS  
Ethernet Line : Shielded, Detachable 1.5m

#### 3.4.4.LED TV HDMI (ARC)

M / N : HU24A5000HWR  
Manufacturer : Hisense

#### 3.4.5.iPad

M / N : A1893  
S / N : DMPY3KL5JF8K  
Manufacturer : Apple

### 3.5. Countermeasures to Achieve EMC Compliance

None.

## 4. EMISSION TEST RESULTS

### 4.1. Asymmetric Mode Conducted Emissions Test

**RESULT** : **Pass**  
Test procedure : EN 55032:2015+A1:2020  
Frequency range : 0.15 ~ 30MHz  
Test Site : Shielded Room  
Limits : EN 55032:2015+A1:2020

#### **Test Setup**

Date of test : Jul. 10, 2023  
Model No. : CS10600R070E, CS10600R070P  
Input Voltage : DC 12V From Battery  
Operation Mode : LAN

The frequency range from 150 kHz to 30 MHz was investigated.

The bandwidth of the test receiver was set at 9 kHz.


The test data of the worst case condition(s) was reported on the following page.

**Note: Test uncertainty:  $\pm 4.32\text{dB}$  at a level of confidence of 95%.**

## Test Data

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

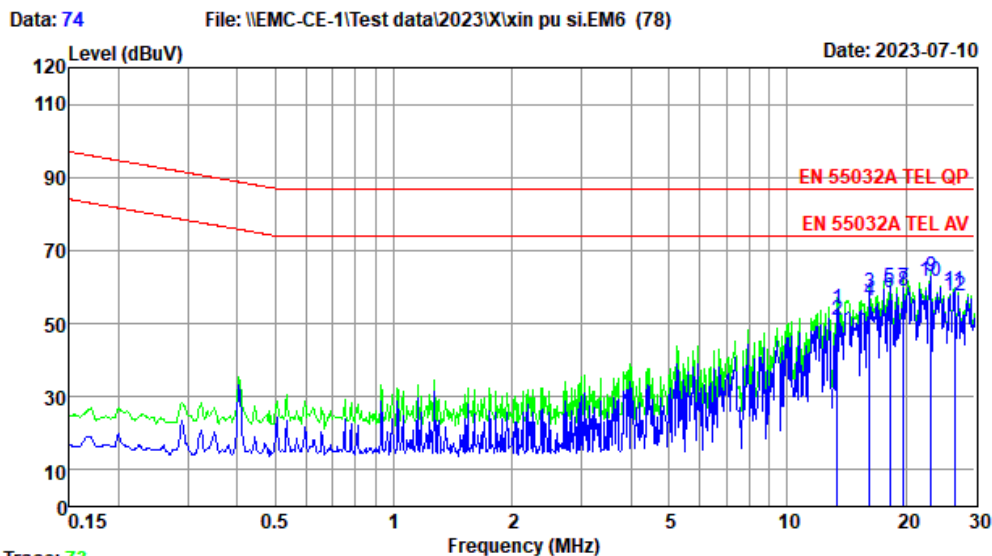

Trace: 73

Site no : 1#CE Shield Room Data no. : 74

Env. / Ins. : Temp:21.8C Humi:50.8% Press:101.50kPa LINE Phase :

Limit : EN 55032A TEL QP

Engineer : GGZ

EUT : Embedded Industrial Computer

Power : DC 12V From Battery

M/N : CS10600R070P

Test Mode : LAN

	Freq. (MHz)	ISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	13.41	9.71	9.96	34.54	54.21	74.00	19.79	Average
2	13.41	9.71	9.96	31.24	50.91	87.00	36.09	QP
3	16.23	9.76	10.02	38.57	58.35	74.00	15.65	Average
4	16.23	9.76	10.02	36.60	56.38	87.00	30.62	QP
5	18.23	9.77	10.05	39.95	59.77	74.00	14.23	Average
6	18.23	9.77	10.05	38.68	58.50	87.00	28.50	QP
7	19.74	9.78	10.08	39.95	59.81	74.00	14.19	Average
8	19.74	9.78	10.08	38.85	58.71	87.00	28.29	QP
9	23.14	9.81	10.09	43.14	63.04	74.00	10.96	Average
10	23.14	9.81	10.09	41.78	61.68	87.00	25.32	QP
11	26.56	9.84	10.10	39.14	59.08	74.00	14.92	Average
12	26.56	9.84	10.10	37.77	57.71	87.00	29.29	QP


Remarks: 1. Emission Level= ISN Factor + Cable Loss + Reading.  
2. Margin= Limit - Emission Level.  
3. If the average limit is met when using a quasi-peak detector,  
the EUT shall be deemed to meet both limits and measurement  
with average detector is unnecessary.



Data: 76

File: \\EMC-CE-1\Test data\2023\X\xin pu si.EM6 (78)

Date: 2023-07-10

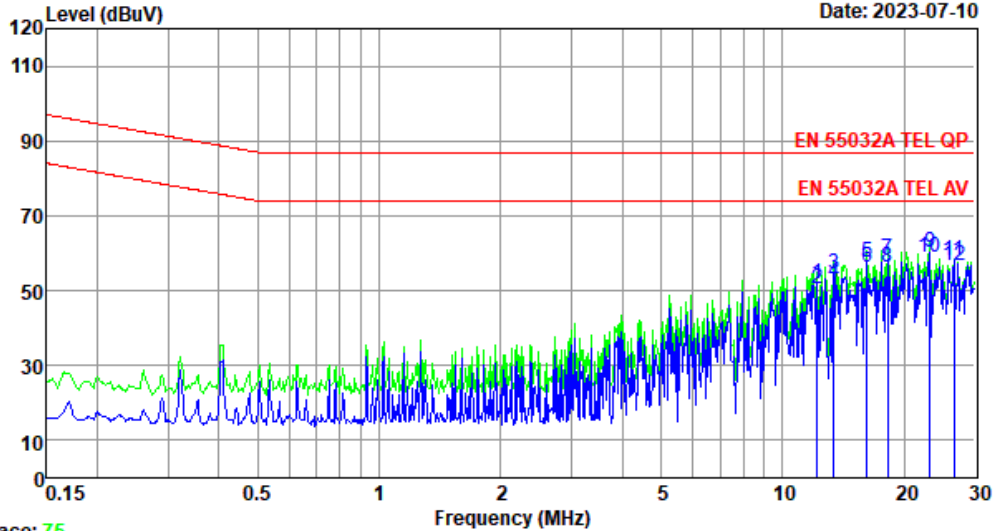

Site no : 1#CE Shield Room Data no. : 76  
Env. / Ins. : Temp:21.8C Humi:50.8% Press:101.50kPa LINE Phase :  
Limit : EN 55032A TEL QP  
Engineer : GGZ  
EUT : Embedded Industrial Computer  
Power : DC 12V From Battery  
M/N : CS10600R070E  
Test Mode : LAN

	Freq. (MHz)	ISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	12.19	9.68	9.93	32.25	51.86	74.00	22.14	Average
2	12.19	9.68	9.93	30.69	50.30	87.00	36.70	QP
3	13.41	9.71	9.96	34.95	54.62	74.00	19.38	Average
4	13.41	9.71	9.96	32.72	52.39	87.00	34.61	QP
5	16.23	9.76	10.02	37.96	57.74	74.00	16.26	Average
6	16.23	9.76	10.02	36.60	56.38	87.00	30.62	QP
7	18.23	9.77	10.05	38.48	58.30	74.00	15.70	Average
8	18.23	9.77	10.05	36.31	56.13	87.00	30.87	QP
9	23.14	9.81	10.09	40.30	60.20	74.00	13.80	Average
10	23.14	9.81	10.09	38.78	58.68	87.00	28.32	QP
11	26.56	9.84	10.10	38.27	58.21	74.00	15.79	Average
12	26.56	9.84	10.10	36.76	56.70	87.00	30.30	QP

Remarks: 1. Emission Level= ISN Factor + Cable Loss + Reading.  
2. Margin= Limit - Emission Level.  
3. If the average limit is met when using a quasi-peak detector,  
the EUT shall be deemed to meet both limits and measurement  
with average detector is unnecessary.

## 4.2. Radiated Emission Test

**RESULT** : **Pass**  
Test procedure : EN 55032:2015+A1:2020  
Frequency range : 30 ~ 1000MHz  
Test Site : 2#966 Chamber  
Limits : EN 55032:2015+A1:2020 Class A


### Test Setup

Date of test : Jul. 11, 2023  
Model No. : CS10600R070E, CS10600R070P  
Input Voltage : DC 12V From Battery  
Operation Mode : TF Mode, Wi-Fi, USB Play, Bluetooth Mode, LAN

The EUT was placed on a turn table which was 0.8 m above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The EUT was tested in the Chamber Site. It was pre-scanned with a Peak detector from the spectrum, and all the final readings from the test receiver were measured with the Quasi-Peak detector.

The bandwidth setting on the test receiver was 120 kHz.

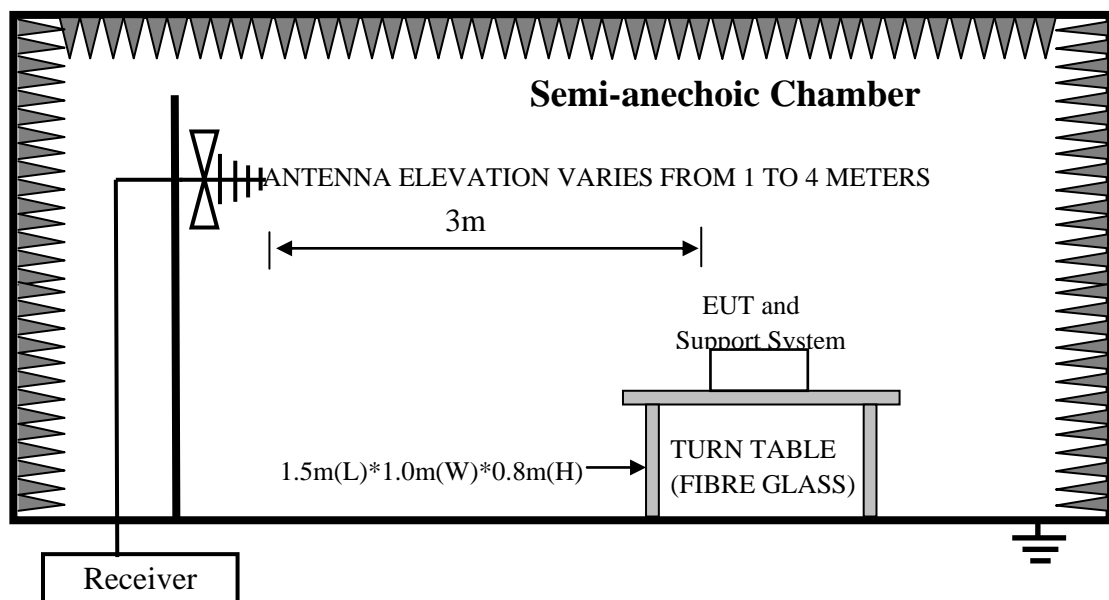

### Note:

Test uncertainty:  $\pm 4.26$  dB (H);  $\pm 4.84$  dB (V) at a level of confidence of 95%.(2#966)

## Test Data


EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 75

File: \\Emc-966-2\\2023\\X\\Xin Pu Si.EM6 (94)

Date: 2023-07-11

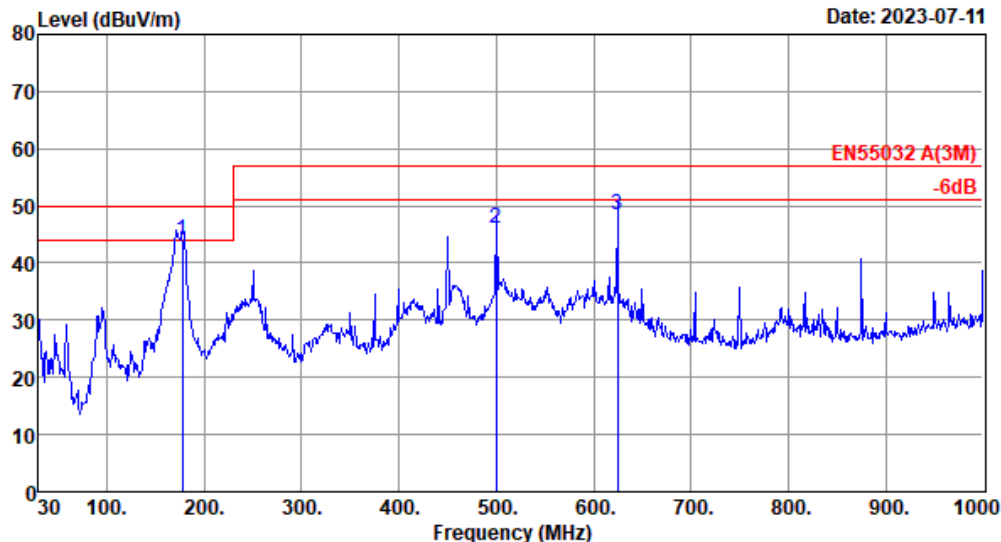

Site no. : 2# 966 chamber                      Data no. : 75  
Dis. / Ant. : 3m 47018                      Ant. pol. : VERTICAL  
Limit : EN55032 A(3M)  
Env. / Ins. : Temp:25.9°C;Humi:56.5%;Press:101.78kPa  
Engineer : Blank  
EUT : Embedded Industrial Computer  
Power : DC 12V From Battery  
M/N : CS10600R070P  
Test Mode : USB Play


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	177.44	9.95	1.62	32.31	43.88	50.00	6.12	QP
2	499.48	18.48	2.92	24.65	46.05	57.00	10.95	QP
3	624.61	20.95	3.38	24.15	48.48	57.00	8.52	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. Margin= Limit - Emission Level.  
3. The emission levels that are 20dB below the official limit are not reported.

Data: 76

File: \\Emc-966-2\2023\X\Xin Pu Si.EM6 (94)

Date: 2023-07-11

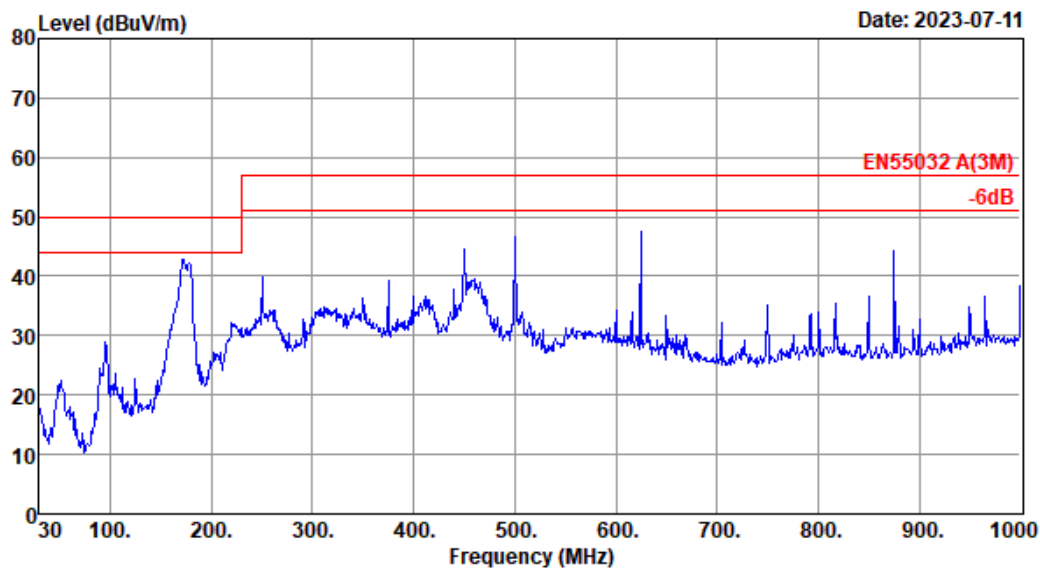


Site no. : 2# 966 chamber Data no. : 76  
Dis. / Ant. : 3m 47018 Ant. pol. : HORIZONTAL  
Limit : EN55032 A(3M)  
Env. / Ins. : Temp:25.9°C;Humi:56.5%;Press:101.78kPa  
Engineer : Blank  
EUT : Embedded Industrial Computer  
Power : DC 12V From Battery  
M/N : CS10600R070P  
Test Mode : USB Play



Data: 77 File: \\Emc-966-2\2023\X\Xin Pu Si.EM6 (94)

Date: 2023-07-11

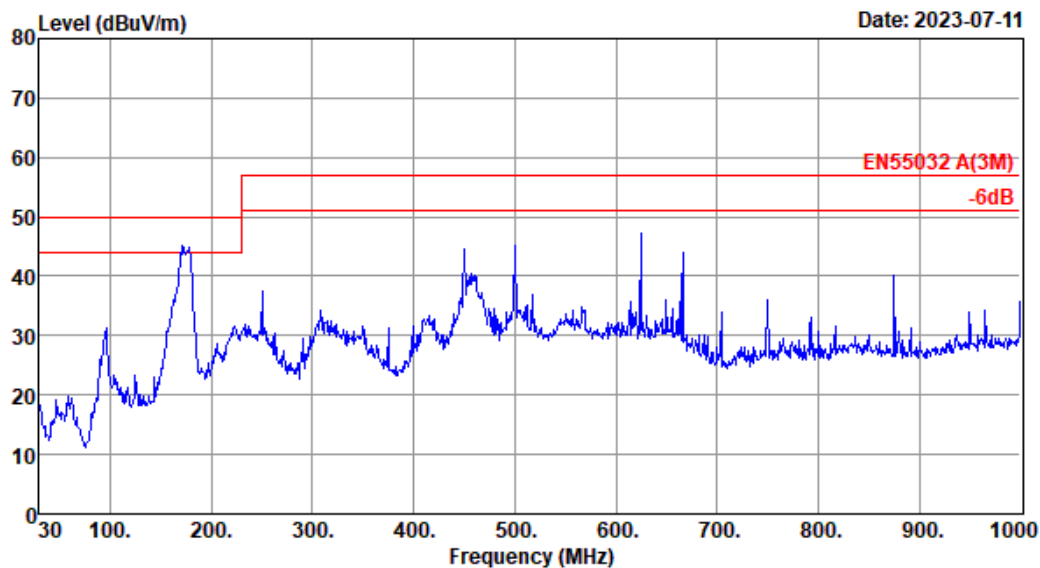


Site no. : 2# 966 chamber Data no. : 77  
Dis. / Ant. : 3m 47018 Ant. pol. : HORIZONTAL  
Limit : EN55032 A(3M)  
Env. / Ins. : Temp:25.9°C;Humi:56.5%;Press:101.78kPa  
Engineer : Blank  
EUT : Embedded Industrial Computer  
Power : DC 12V From Battery  
M/N : CS10600R070P  
Test Mode : LAN

Data: 78

File: \\Emc-966-2\\2023\\X\\Xin Pu Si.EM6 (94)

Date: 2023-07-11

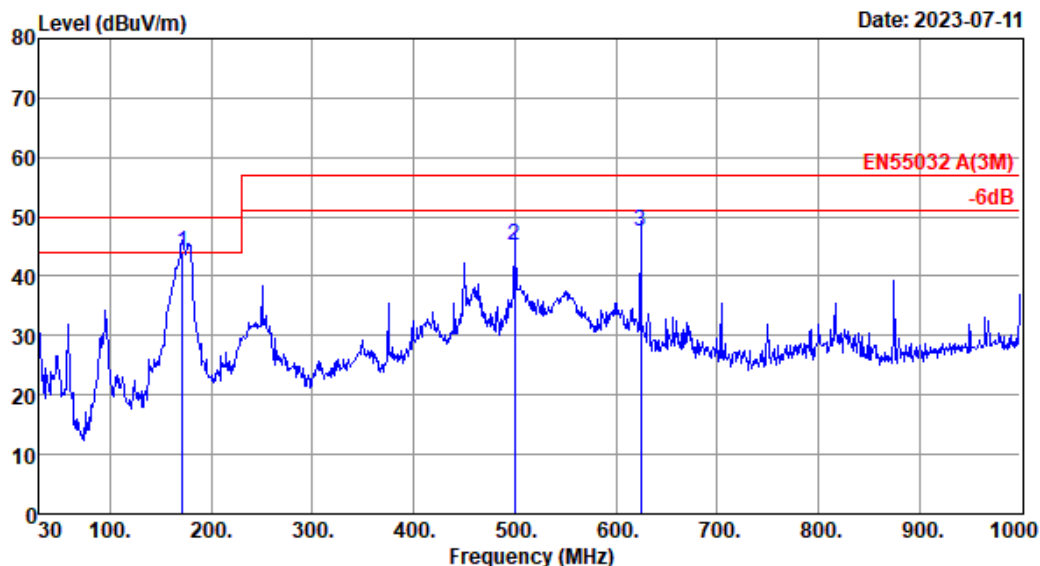

Site no. : 2# 966 chamber Data no. : 78  
Dis. / Ant. : 3m 47018 Ant. pol. : VERTICAL  
Limit : EN55032 A(3M)  
Env. / Ins. : Temp:25.9°C;Humi:56.5%;Press:101.78kPa  
Engineer : Blank  
EUT : Embedded Industrial Computer  
Power : DC 12V From Battery  
M/N : CS10600R070P  
Test Mode : LAN


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	171.62	9.84	1.06	33.13	44.03	50.00	5.97	QP
2	499.48	18.28	2.28	24.70	45.26	57.00	11.74	QP
3	624.61	20.75	2.64	24.01	47.40	57.00	9.60	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. Margin= Limit - Emission Level.  
3. The emission levels that are 20dB below the official limit are not reported.

Data: 79

File: \\Emc-966-2\\2023\\X\\Xin Pu Si.EM6 (94)

Date: 2023-07-11

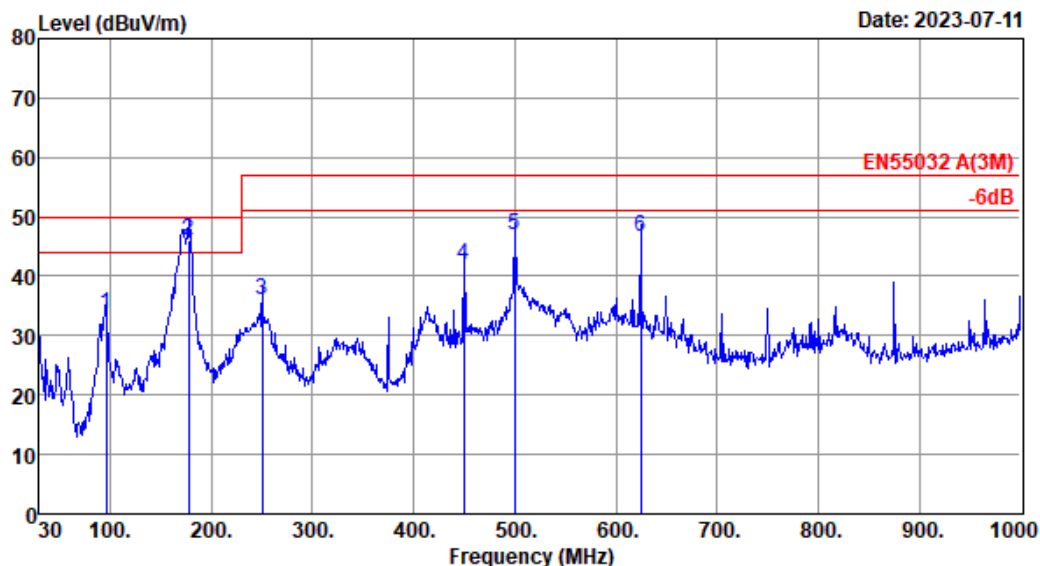

Site no. : 2# 966 chamber Data no. : 79  
Dis. / Ant. : 3m 47018 Ant. pol. : VERTICAL  
Limit : EN55032 A(3M)  
Env. / Ins. : Temp:25.9°C;Humi:56.5%;Press:101.78kPa  
Engineer : Blank  
EUT : Embedded Industrial Computer  
Power : DC 12V From Battery  
M/N : CS10600R070P  
Test Mode : Wi-Fi


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	95.96	9.82	0.75	22.97	33.54	50.00	16.46	QP
2	177.44	9.75	1.09	35.35	46.19	50.00	3.81	QP
3	250.19	12.60	1.44	21.96	36.00	57.00	21.00	QP
4	450.01	17.10	2.17	22.62	41.89	57.00	15.11	QP
5	499.48	18.28	2.28	26.42	46.98	57.00	10.02	QP
6	624.61	20.75	2.64	23.38	46.77	57.00	10.23	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. Margin= Limit - Emission Level.  
3. The emission levels that are 20dB below the official limit are not reported.

Data: 80

File: \\Emc-966-2\\2023\\X\\Xin Pu Si.EM6 (94)

Date: 2023-07-11

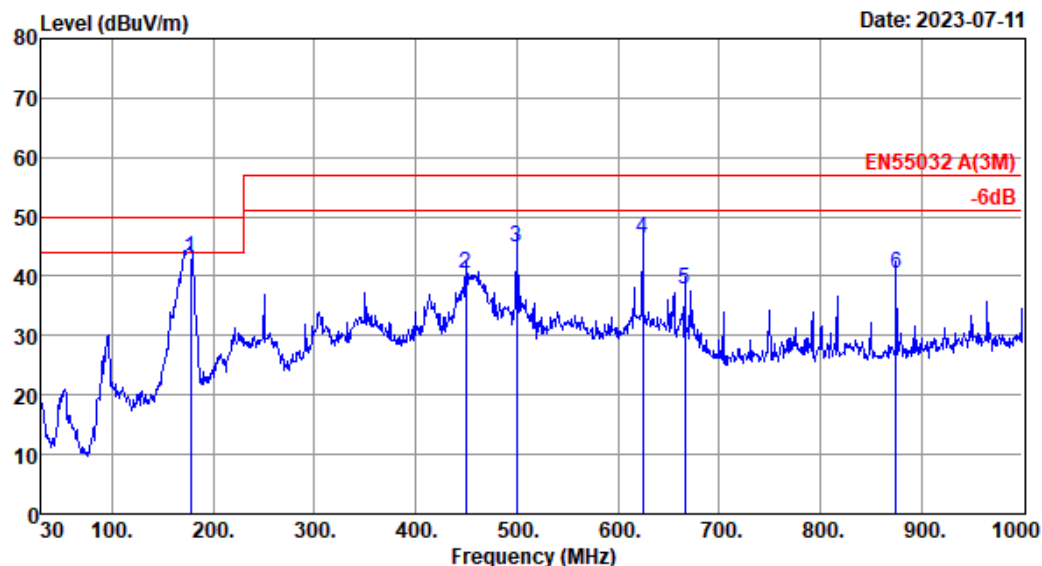


Site no. : 2# 966 chamber Data no. : 80  
Dis. / Ant. : 3m 47018 Ant. pol. : HORIZONTAL  
Limit : EN55032 A(3M)  
Env. / Ins. : Temp:25.9°C;Humi:56.5%;Press:101.78kPa  
Engineer : Blank  
EUT : Embedded Industrial Computer  
Power : DC 12V From Battery  
M/N : CS10600R070P  
Test Mode : Wi-Fi

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	177.44	9.75	1.09	32.33	43.17	50.00	6.83	QP
2	450.01	17.10	2.17	21.24	40.51	57.00	16.49	QP
3	499.48	18.28	2.28	24.40	44.96	57.00	12.04	QP
4	624.61	20.75	2.64	22.87	46.26	57.00	10.74	QP
5	666.32	21.46	2.76	13.52	37.74	57.00	19.26	QP
6	874.87	23.75	3.26	13.56	40.57	57.00	16.43	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. Margin= Limit - Emission Level.  
3. The emission levels that are 20dB below the official limit are not reported.

Data: 81 File: \\Emc-966-2\2023\X\Xin Pu Si.EM6 (94)


Date: 2023-07-11

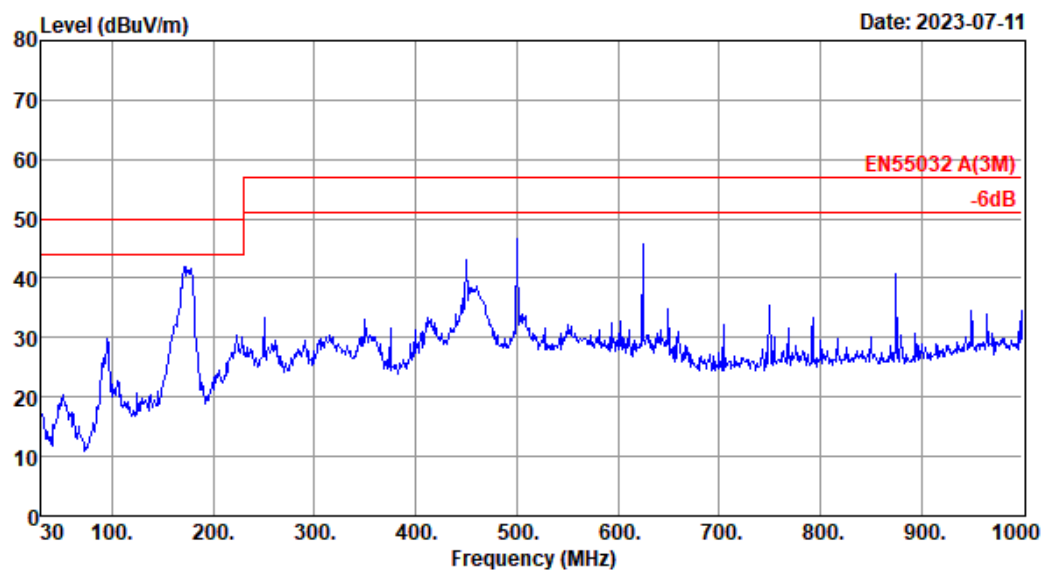

Site no. : 2# 966 chamber Data no. : 81  
Dis. / Ant. : 3m 47018 Ant. pol. : HORIZONTAL  
Limit : EN55032 A(3M)  
Env. / Ins. : Temp:25.9°C;Humi:56.5%;Press:101.78kPa  
Engineer : Blank  
EUT : Embedded Industrial Computer  
Power : DC 12V From Battery  
M/N : CS10600R070P  
Test Mode : Bluetooth

Data: 82 File: \\Emc-966-2\\2023\\X\\Xin Pu Si.EM6 (94)

Date: 2023-07-11

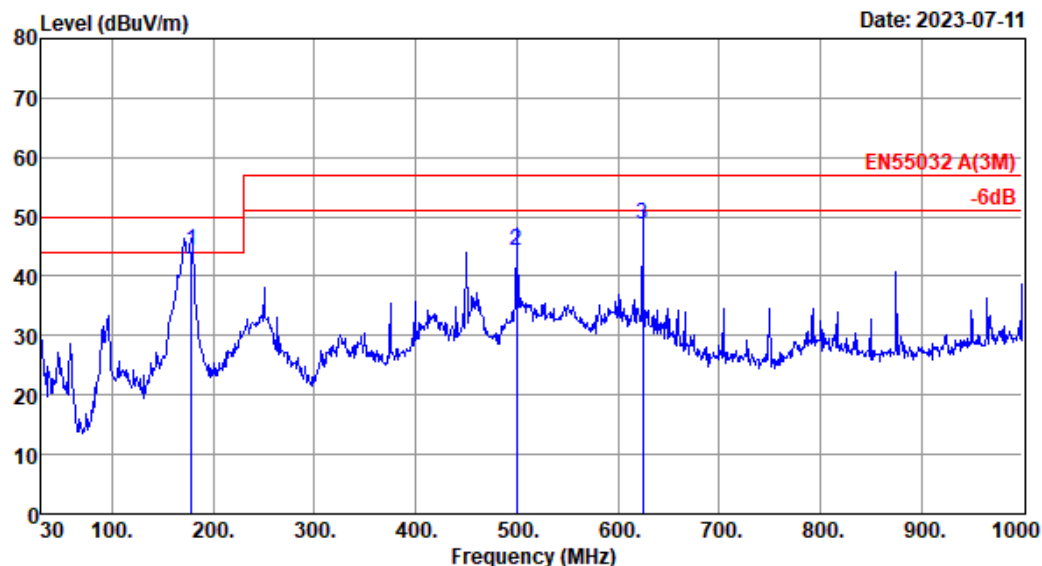

Site no. : 2# 966 chamber Data no. : 82  
Dis. / Ant. : 3m 47018 Ant. pol. : VERTICAL  
Limit : EN55032 A(3M)  
Env. / Ins. : Temp:25.9°C;Humi:56.5%;Press:101.78kPa  
Engineer : Blank  
EUT : Embedded Industrial Computer  
Power : DC 12V From Battery  
M/N : CS10600R070P  
Test Mode : Bluetooth


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	178.41	9.70	1.08	33.63	44.41	50.00	5.59	QP
2	499.48	18.28	2.28	23.60	44.16	57.00	12.84	QP
3	624.61	20.75	2.64	25.24	48.63	57.00	8.37	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. Margin= Limit - Emission Level.  
3. The emission levels that are 20dB below the official limit are not reported.

Data: 83

File: \\Emc-966-2\\2023\\X\\Xin Pu Si.EM6 (94)

Date: 2023-07-11

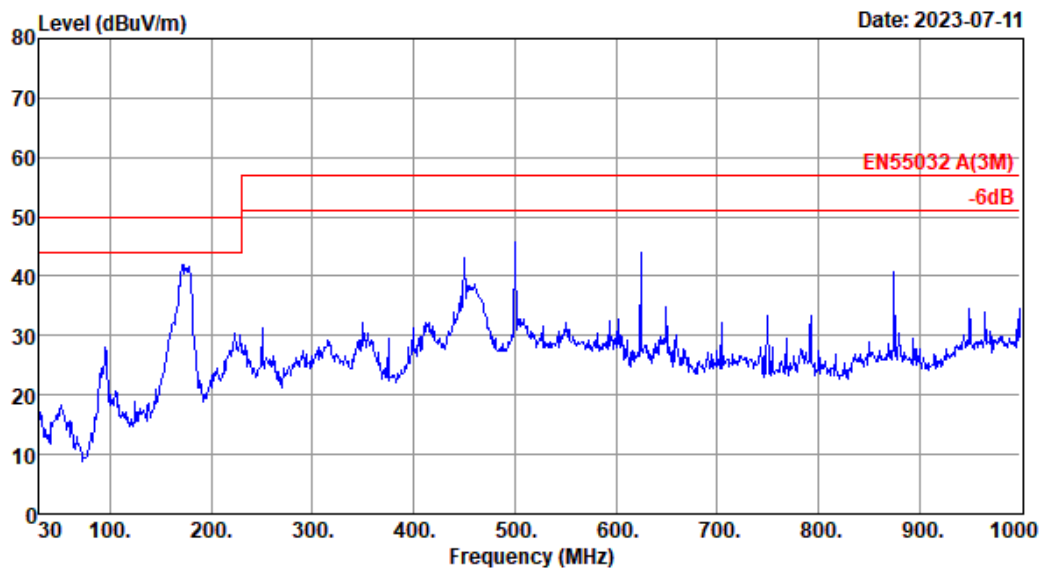


Site no. : 2# 966 chamber Data no. : 83  
Dis. / Ant. : 3m 47018 Ant. pol. : HORIZONTAL  
Limit : EN55032 A(3M)  
Env. / Ins. : Temp:25.9°C;Humi:56.5%;Press:101.78kPa  
Engineer : Blank  
EUT : Embedded Industrial Computer  
Power : DC 12V From Battery  
M/N : CS10600R070P  
Test Mode : TF Mode

Data: 84

File: \\Emc-966-2\2023\X\Xin Pu Si.EM6 (94)

Date: 2023-07-11

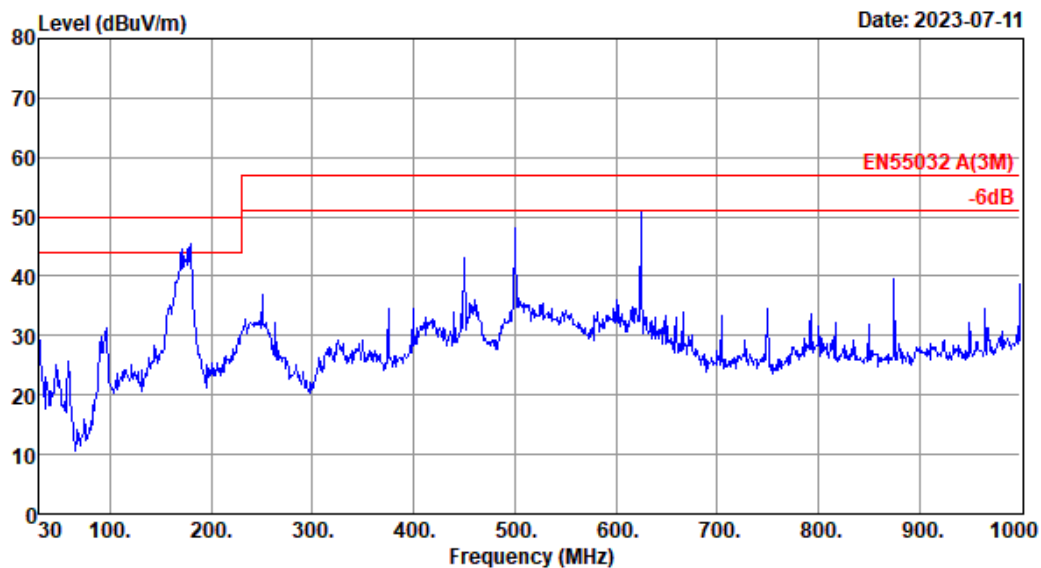


Site no. : 2# 966 chamber Data no. : 84  
Dis. / Ant. : 3m 47018 Ant. pol. : VERTICAL  
Limit : EN55032 A(3M)  
Env. / Ins. : Temp:25.9°C;Humi:56.5%;Press:101.78kPa  
Engineer : Blank  
EUT : Embedded Industrial Computer  
Power : DC 12V From Battery  
M/N : CS10600R070P  
Test Mode : TF Mode



Data: 85

File: \\Emc-966-2\2023\X\Xin Pu Si.EM6 (94)

Date: 2023-07-11

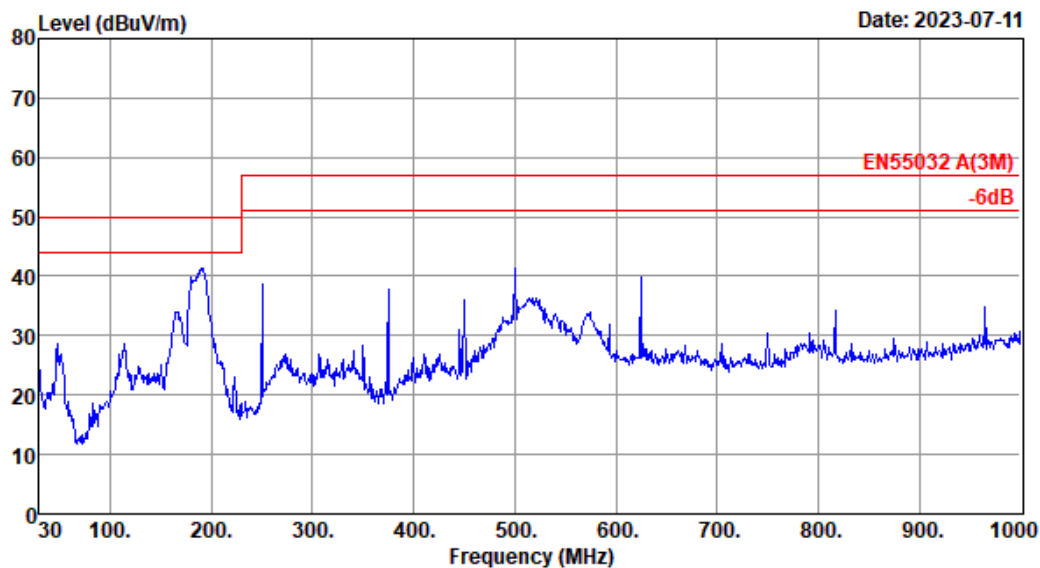


Site no. : 2# 966 chamber Data no. : 85  
Dis. / Ant. : 3m 47018 Ant. pol. : VERTICAL  
Limit : EN55032 A(3M)  
Env. / Ins. : Temp:25.9°C;Humi:56.5%;Press:101.78kPa  
Engineer : Blank  
EUT : Embedded Industrial Computer  
Power : DC 12V From Battery  
M/N : CS10600R070E  
Test Mode : USB Play

Data: 86

File: \\Emc-966-2\2023\X\Xin Pu Si.EM6 (94)

Date: 2023-07-11

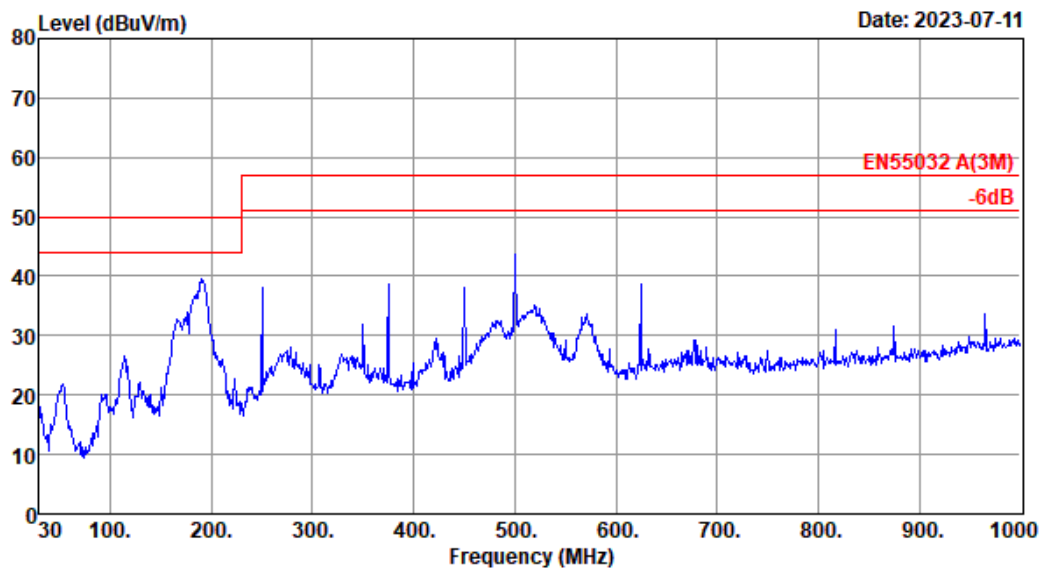


Site no. : 2# 966 chamber Data no. : 86  
Dis. / Ant. : 3m 47018 Ant. pol. : HORIZONTAL  
Limit : EN55032 A(3M)  
Env. / Ins. : Temp:25.9°C;Humi:56.5%;Press:101.78kPa  
Engineer : Blank  
EUT : Embedded Industrial Computer  
Power : DC 12V From Battery  
M/N : CS10600R070E  
Test Mode : USB Play

Data: 87

File: \\Emc-966-2\\2023\\X\\Xin Pu Si.EM6 (94)

Date: 2023-07-11

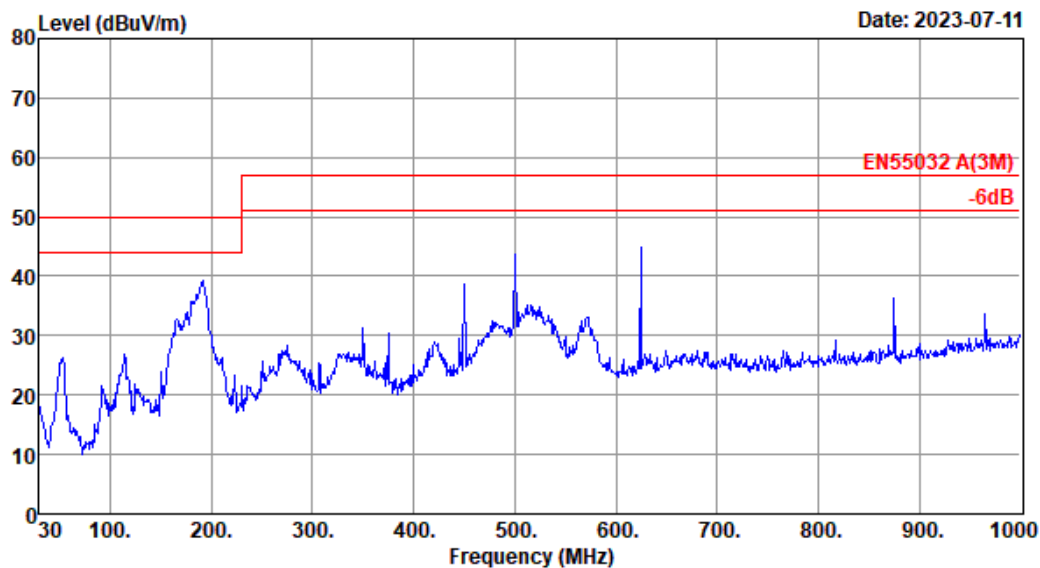


Site no. : 2# 966 chamber Data no. : 87  
Dis. / Ant. : 3m 47018 Ant. pol. : HORIZONTAL  
Limit : EN55032 A(3M)  
Env. / Ins. : Temp:25.9°C;Humi:56.5%;Press:101.78kPa  
Engineer : Blank  
EUT : Embedded Industrial Computer  
Power : DC 12V From Battery  
M/N : CS10600R070E  
Test Mode : LAN

Data: 88

File: \\Emc-966-2\2023\X\Xin Pu Si.EM6 (94)

Date: 2023-07-11

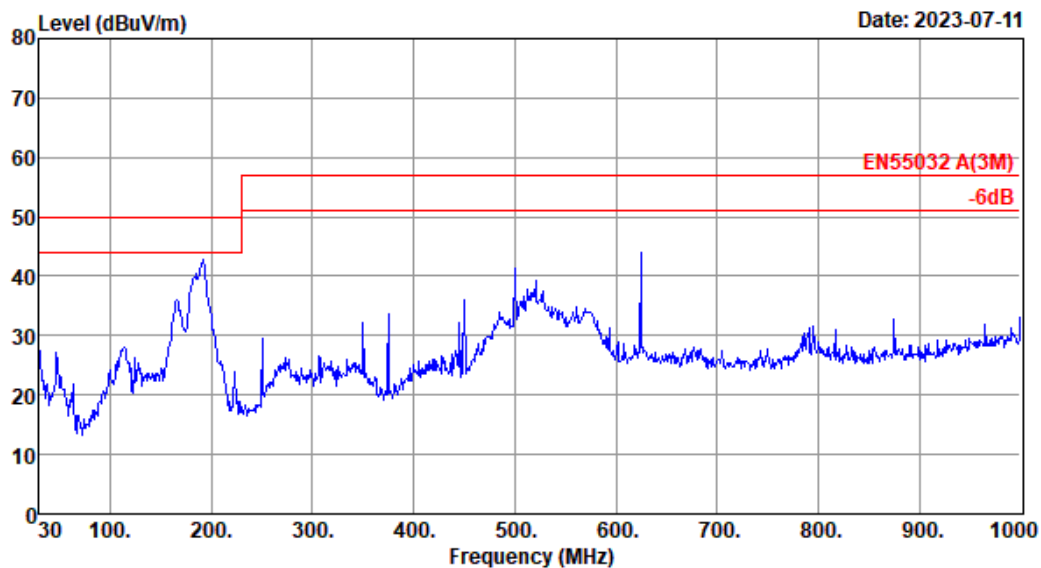


Site no. : 2# 966 chamber Data no. : 88  
Dis. / Ant. : 3m 47018 Ant. pol. : VERTICAL  
Limit : EN55032 A(3M)  
Env. / Ins. : Temp:25.9°C;Humi:56.5%;Press:101.78kPa  
Engineer : Blank  
EUT : Embedded Industrial Computer  
Power : DC 12V From Battery  
M/N : CS10600R070E  
Test Mode : LAN

Data: 89

File: \\Emc-966-2\2023\X\Xin Pu Si.EM6 (94)

Date: 2023-07-11

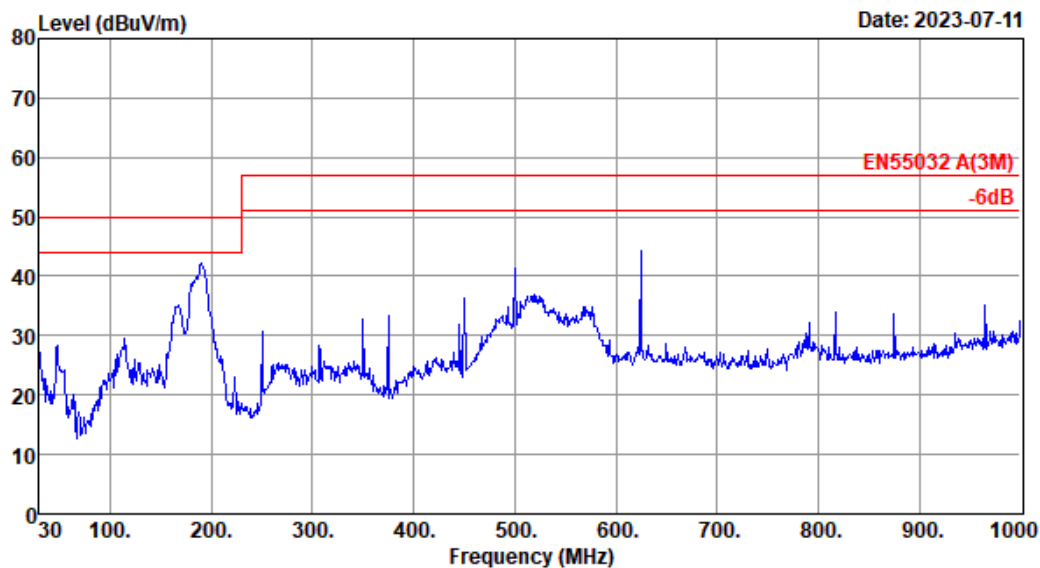


Site no. : 2# 966 chamber Data no. : 89  
Dis. / Ant. : 3m 47018 Ant. pol. : VERTICAL  
Limit : EN55032 A(3M)  
Env. / Ins. : Temp:25.9°C;Humi:56.5%;Press:101.78kPa  
Engineer : Blank  
EUT : Embedded Industrial Computer  
Power : DC 12V From Battery  
M/N : CS10600R070E  
Test Mode : Wi-Fi

Data: 90

File: \\Emc-966-2\2023\X\Xin Pu Si.EM6 (94)


Date: 2023-07-11

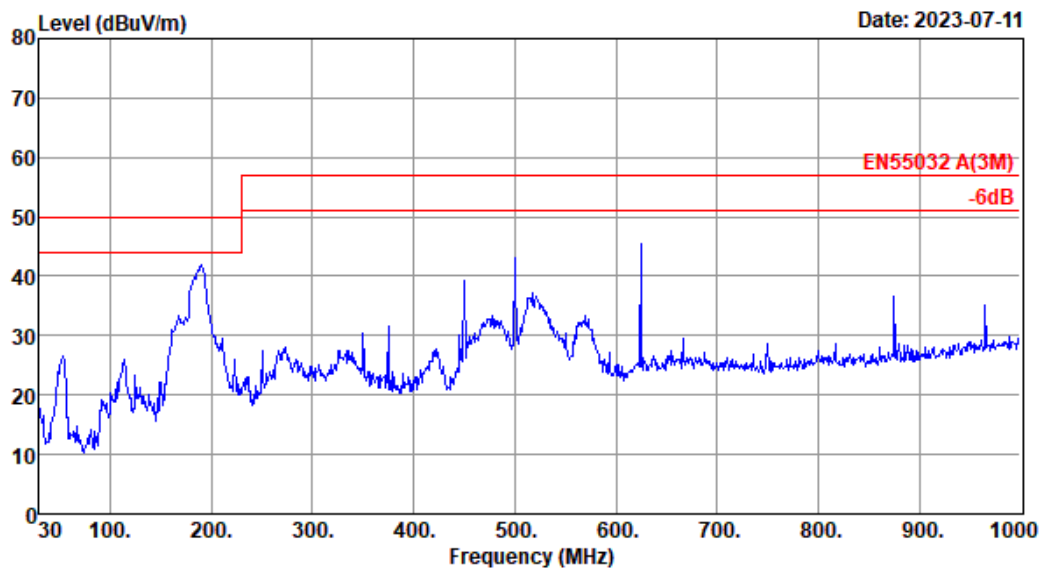

Site no. : 2# 966 chamber Data no. : 90  
Dis. / Ant. : 3m 47018 Ant. pol. : HORIZONTAL  
Limit : EN55032 A(3M)  
Env. / Ins. : Temp:25.9°C;Humi:56.5%;Press:101.78kPa  
Engineer : Blank  
EUT : Embedded Industrial Computer  
Power : DC 12V From Battery  
M/N : CS10600R070E  
Test Mode : Wi-Fi

Data: 91 File: \\Emc-966-2\2023\X\Xin Pu Si.EM6 (94)


Date: 2023-07-11

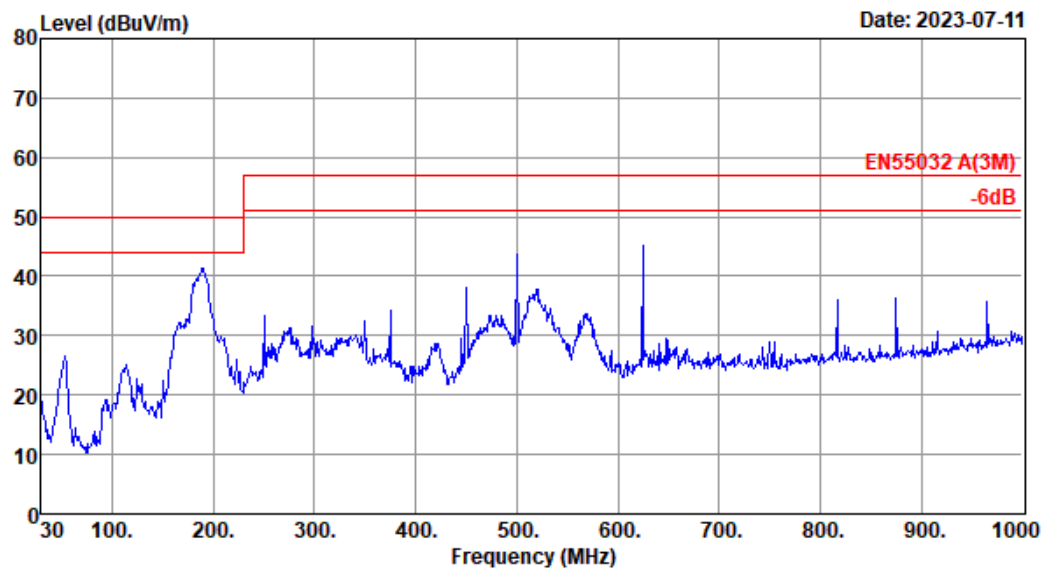

Site no. : 2# 966 chamber Data no. : 91  
Dis. / Ant. : 3m 47018 Ant. pol. : HORIZONTAL  
Limit : EN55032 A(3M)  
Env. / Ins. : Temp:25.9°C;Humi:56.5%;Press:101.78kPa  
Engineer : Blank  
EUT : Embedded Industrial Computer  
Power : DC 12V From Battery  
M/N : CS10600R070E  
Test Mode : Bluetooth

Data: 92 File: \\Emc-966-2\2023\X\Xin Pu Si.EM6 (94)

Date: 2023-07-11

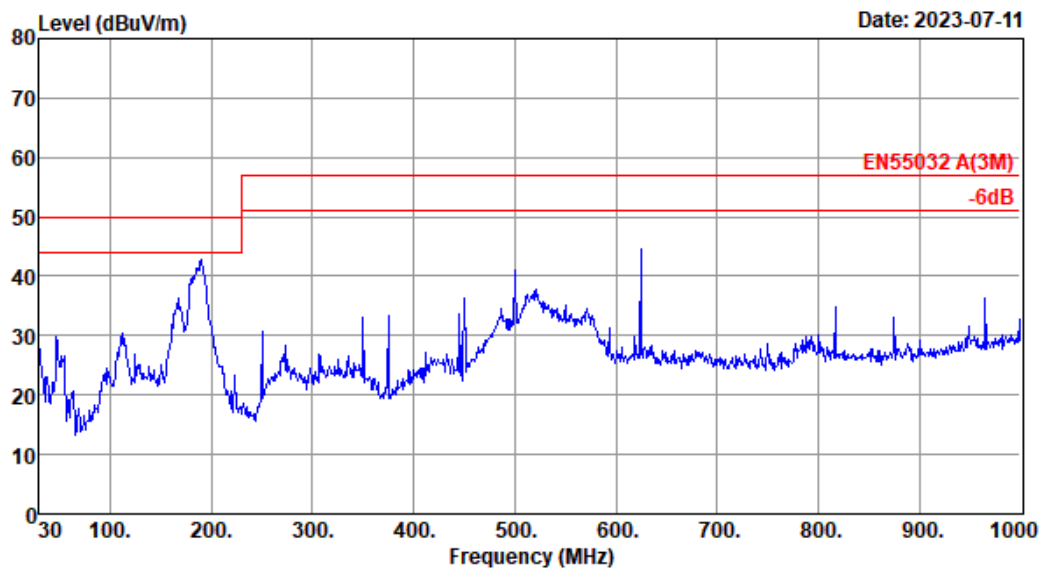


Site no. : 2# 966 chamber Data no. : 92  
Dis. / Ant. : 3m 47018 Ant. pol. : VERTICAL  
Limit : EN55032 A(3M)  
Env. / Ins. : Temp:25.9°C;Humi:56.5%;Press:101.78kPa  
Engineer : Blank  
EUT : Embedded Industrial Computer  
Power : DC 12V From Battery  
M/N : CS10600R070E  
Test Mode : Bluetooth



Data: 93

File: \\Emc-966-2\2023\X\Xin Pu Si.EM6 (94)


Date: 2023-07-11

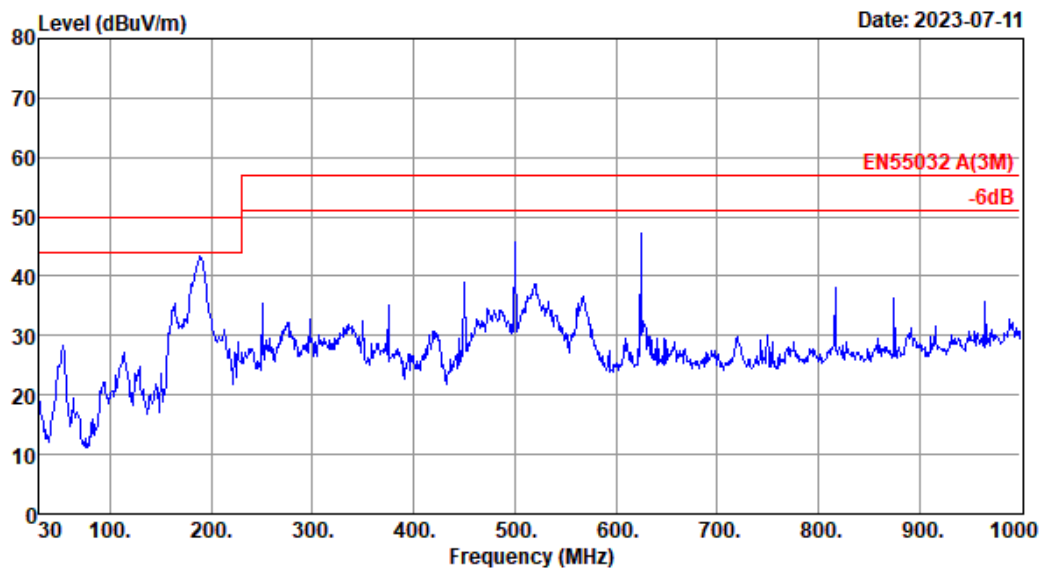

Site no. : 2# 966 chamber Data no. : 93  
Dis. / Ant. : 3m 47018 Ant. pol. : HORIZONTAL  
Limit : EN55032 A(3M)  
Env. / Ins. : Temp:25.9°C;Humi:56.5%;Press:101.78kPa  
Engineer : Blank  
EUT : Embedded Industrial Computer  
Power : DC 12V From Battery  
M/N : CS10600R070E  
Test Mode : TF Mode

Data: 94 File: \\Emc-966-2\2023\X\Xin Pu Si.EM6 (94)

Date: 2023-07-11

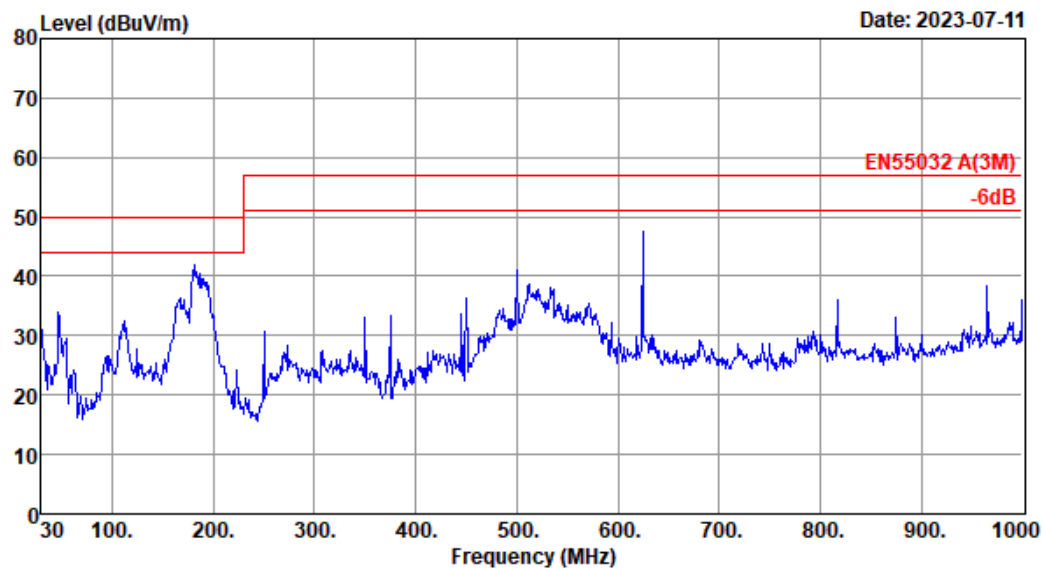

Site no.	: 2# 966 chamber	Data no.	: 94
Dis. / Ant.	: 3m 47018	Ant. pol.	: VERTICAL
Limit	: EN55032 A(3M)		
Env. / Ins.	: Temp:25.9°C;Humi:56.5%;Press:101.78kPa		
Engineer	: Blank		
EUT	: Embedded Industrial Computer		
Power	: DC 12V From Battery		
M/N	: CS10600R070E		
Test Mode	: TF Mode		

### 4.3. Radiated Emission Test (above 1GHz)

**RESULT** : **Pass**  
Test procedure : EN 55032:2015+A1:2020  
Frequency range : 1GHz-6GHz  
Test Site : 966 Chamber  
Limits : EN 55032:2015+A1:2020 Class A


#### Test Setup

Date of test : Jul. 08, 2023  
Model No. : CS10600R070E, CS10600R070P  
Input Voltage : DC 12V From Battery  
Operation Mode : TF Mode, Wi-Fi, USB Play, Bluetooth Mode, LAN

The EUT was placed on a turn table which was 0.8 m above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The EUT was tested in the Chamber Site. It was pre-scanned with a Peak detector and Average detector from the spectrum, and all the final readings from the test receiver were measured with the Peak detector and Average detector.

The bandwidth setting on the test receiver was 1MHz(above 1GHz).

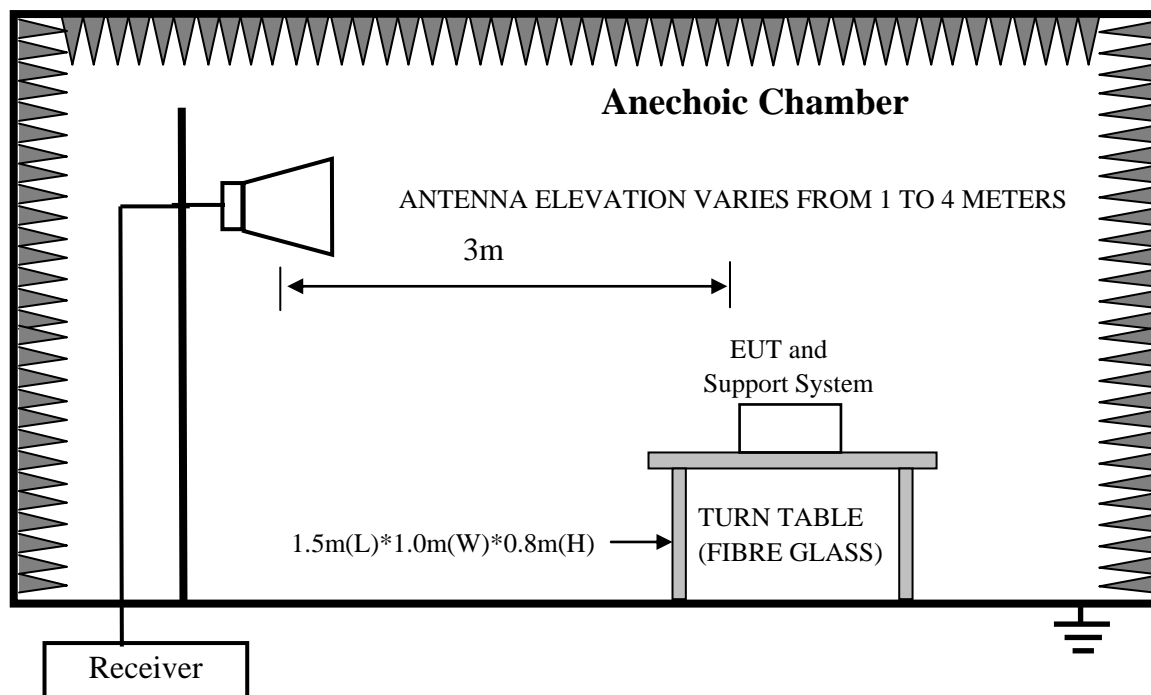


**Note: Test uncertainty:  $\pm 4.72\text{dB}$  at a level of confidence of 95%.**

## Test Data

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

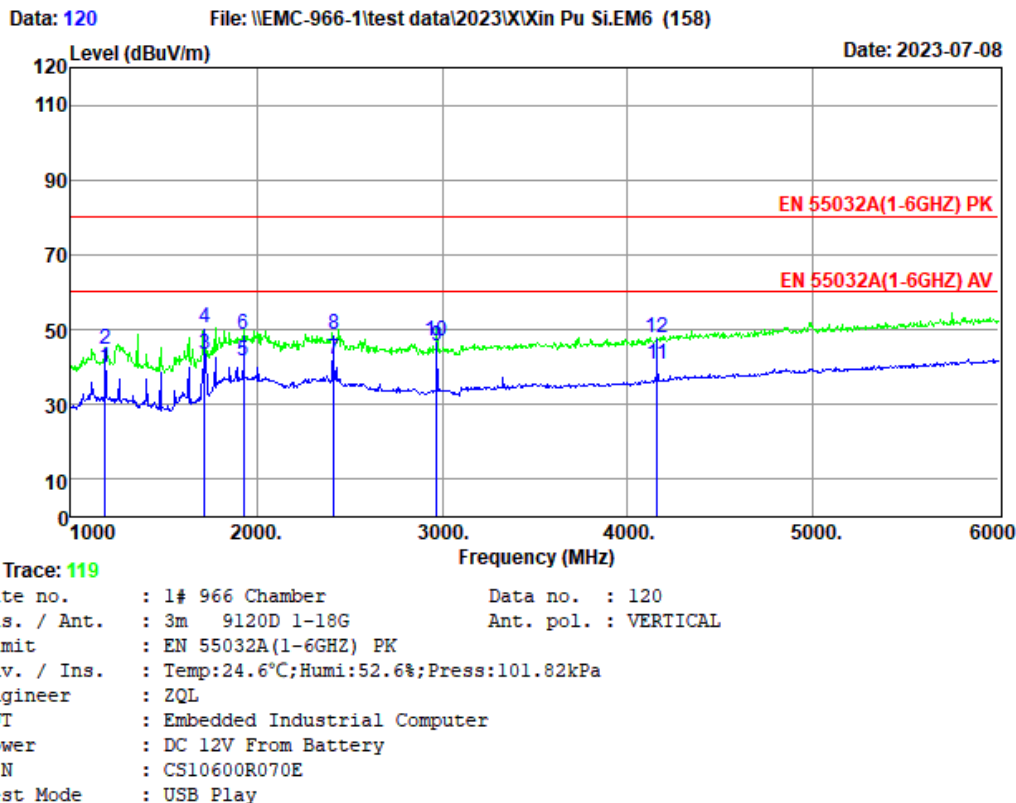

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1185.00	24.73	2.41	12.60	39.74	60.00	20.26	Average
2	1185.00	24.73	2.41	17.60	44.74	80.00	35.26	Peak
3	1720.00	25.63	2.96	14.93	43.52	60.00	16.48	Average
4	1720.00	25.63	2.96	21.79	50.38	80.00	29.62	Peak
5	1930.00	26.40	3.19	12.11	41.70	60.00	18.30	Average
6	1930.00	26.40	3.19	19.08	48.67	80.00	31.33	Peak
7	2415.00	27.57	3.57	10.98	42.12	60.00	17.88	Average
8	2415.00	27.57	3.57	17.42	48.56	80.00	31.44	Peak
9	2970.00	29.00	3.98	12.41	45.39	60.00	14.61	Average
10	2970.00	29.00	3.98	13.99	46.97	80.00	33.03	Peak
11	4160.00	30.60	4.48	5.83	40.91	60.00	19.09	Average
12	4160.00	30.60	4.48	12.85	47.93	80.00	32.07	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. Margin= Limit - Emission Level.  
3. The emission levels that are 20dB below the official limit are not reported.



Data: 122

File: \\EMC-966-1\test data\2023\Xin Pu Si.EM6 (158)

Date: 2023-07-08

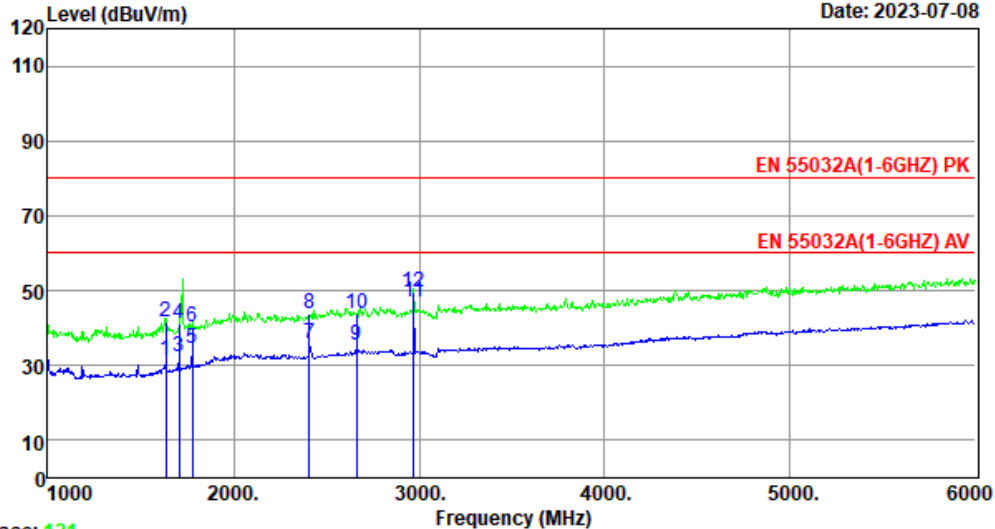

Trace: 121


Site no. : 1# 966 Chamber Data no. : 122  
 Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL  
 Limit : EN 55032A(1-6GHZ) PK  
 Env. / Ins. : Temp:24.6°C;Humi:52.6%;Press:101.82kPa  
 Engineer : ZQL  
 EUT : Embedded Industrial Computer  
 Power : DC 12V From Battery  
 M/N : CS10600R070E  
 Test Mode : USB Play


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1635.00	25.77	2.87	2.79	31.43	60.00	28.57	Average
2	1635.00	25.77	2.87	12.96	41.60	80.00	38.40	Peak
3	1705.00	25.70	2.94	3.81	32.45	60.00	27.55	Average
4	1705.00	25.70	2.94	12.76	41.40	80.00	38.60	Peak
5	1780.00	25.43	3.03	6.21	34.67	60.00	25.33	Average
6	1780.00	25.43	3.03	11.85	40.31	80.00	39.69	Peak
7	2410.00	27.57	3.57	4.56	35.70	60.00	24.30	Average
8	2410.00	27.57	3.57	12.55	43.69	80.00	36.31	Peak
9	2665.00	27.93	3.76	3.89	35.58	60.00	24.42	Average
10	2665.00	27.93	3.76	12.13	43.82	80.00	36.18	Peak
11	2970.00	29.00	3.98	14.01	46.99	60.00	13.01	Average
12	2970.00	29.00	3.98	16.78	49.76	80.00	30.24	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.

2. Margin= Limit - Emission Level.


3. The emission levels that are 20dB below the official limit are not reported.

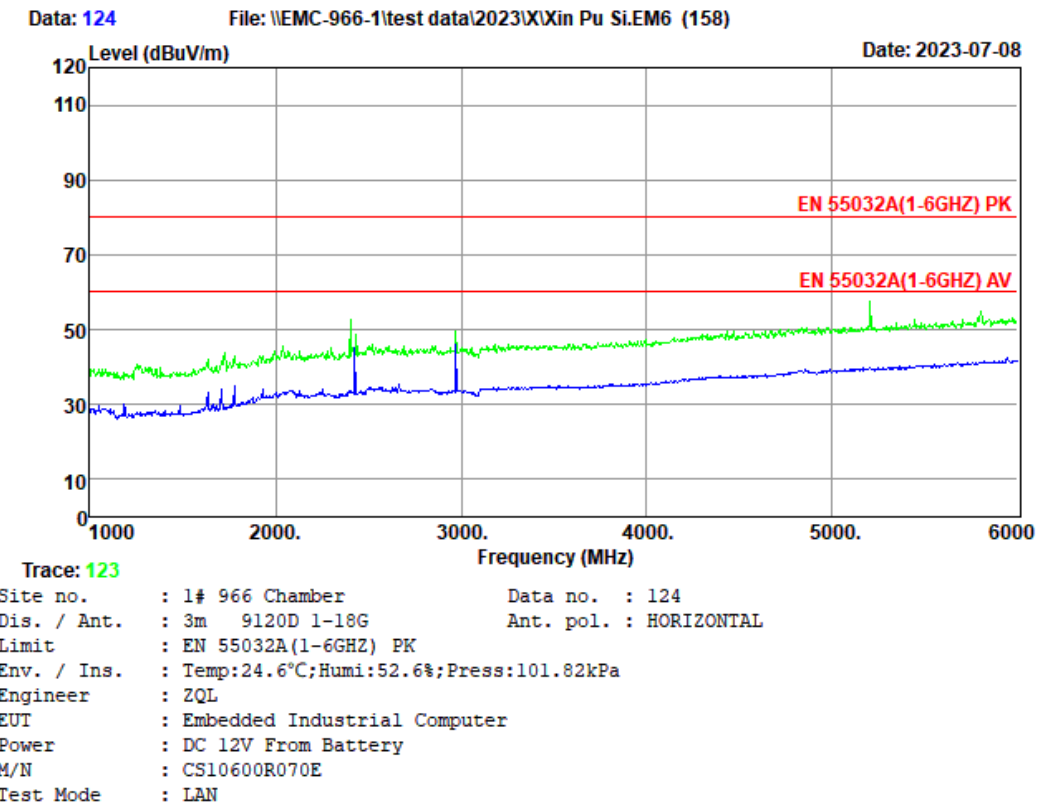

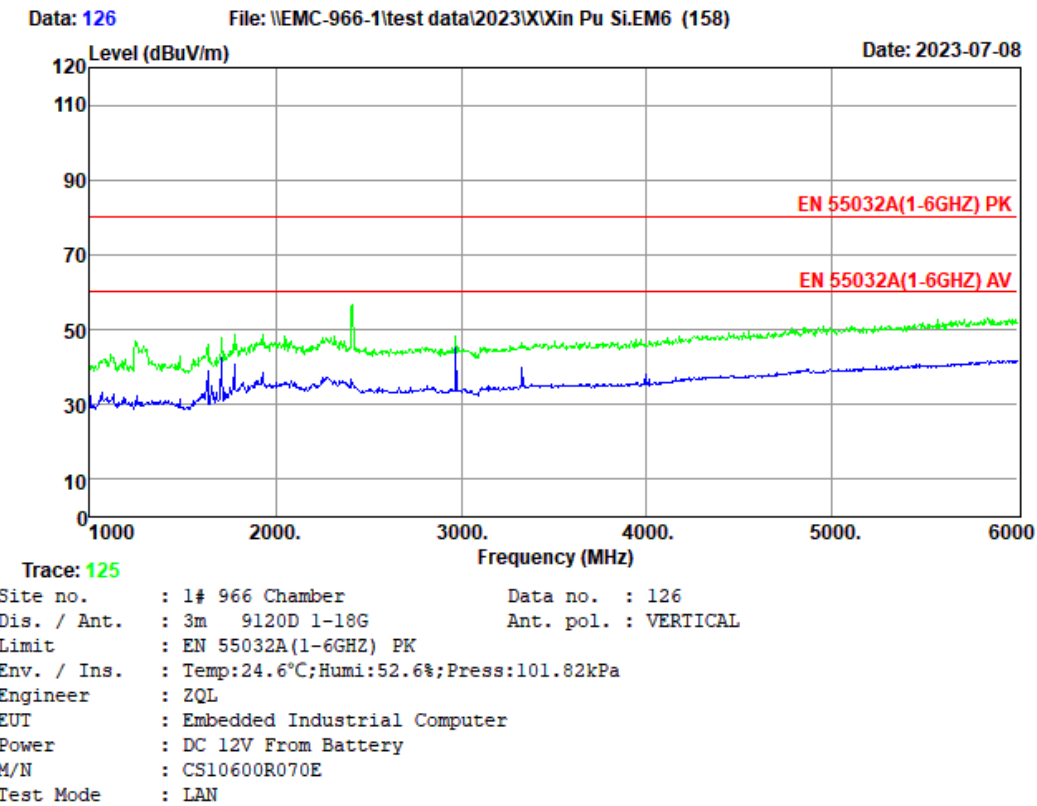

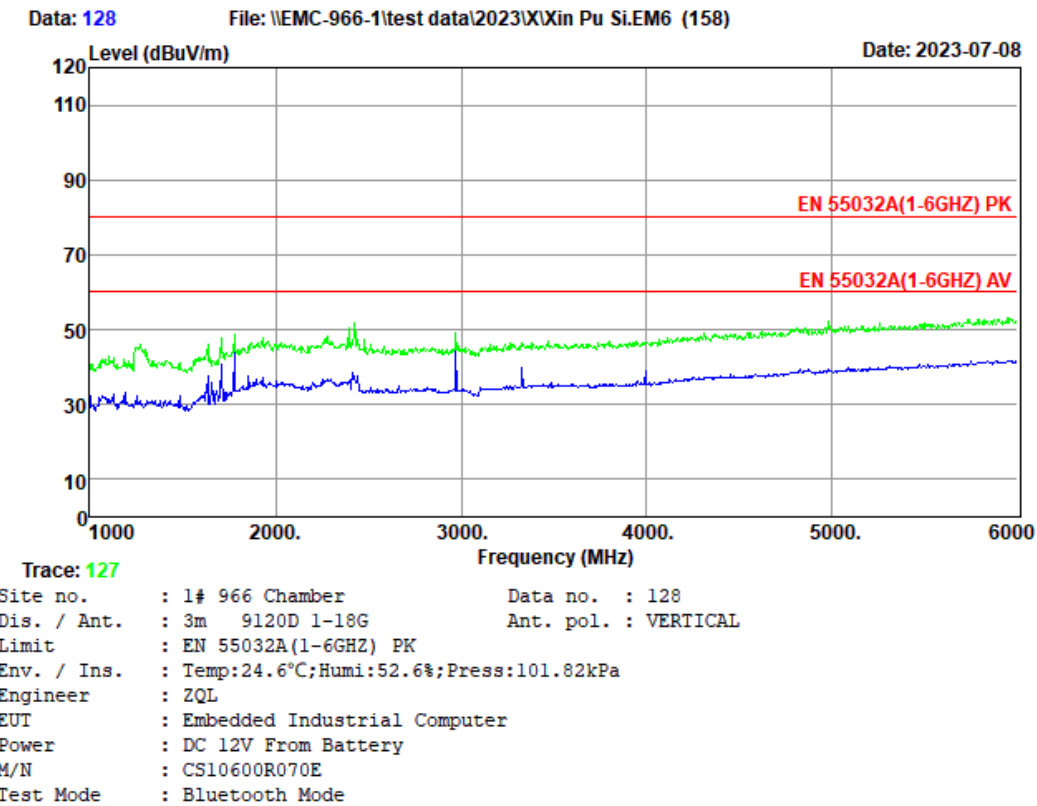




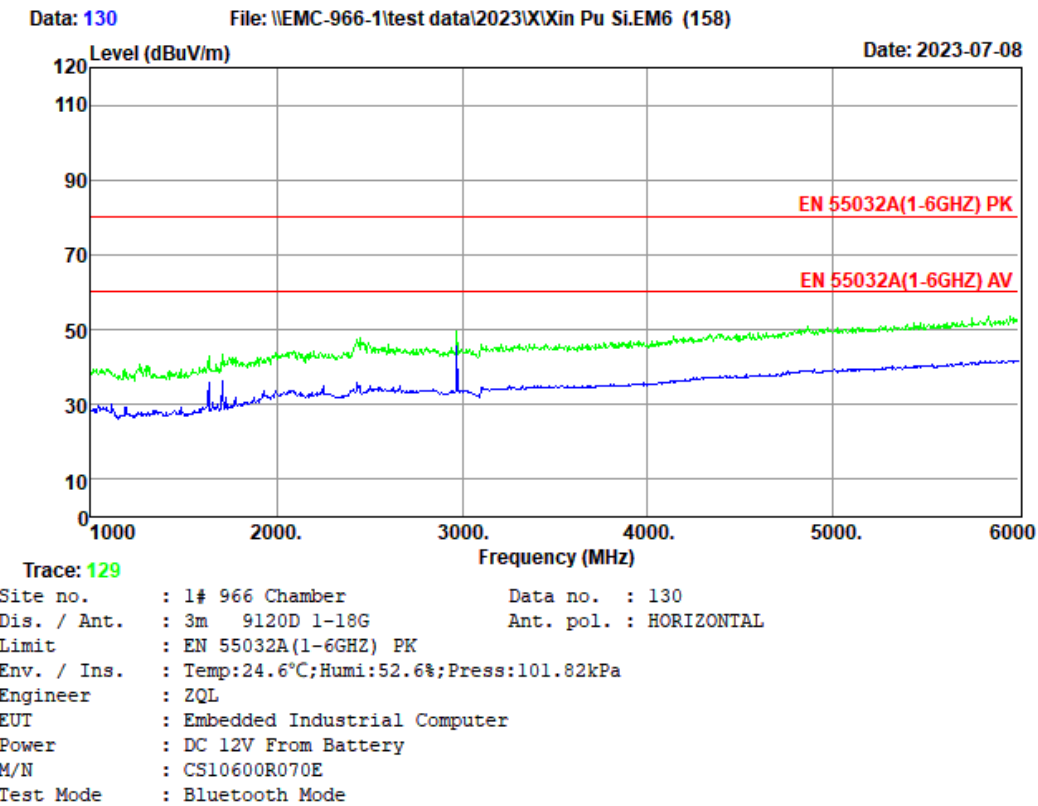

Data: 132


File: \\EMC-966-1\\test data\\2023\\X\\Xin Pu Si.EM6 (158)


Date: 2023-07-08

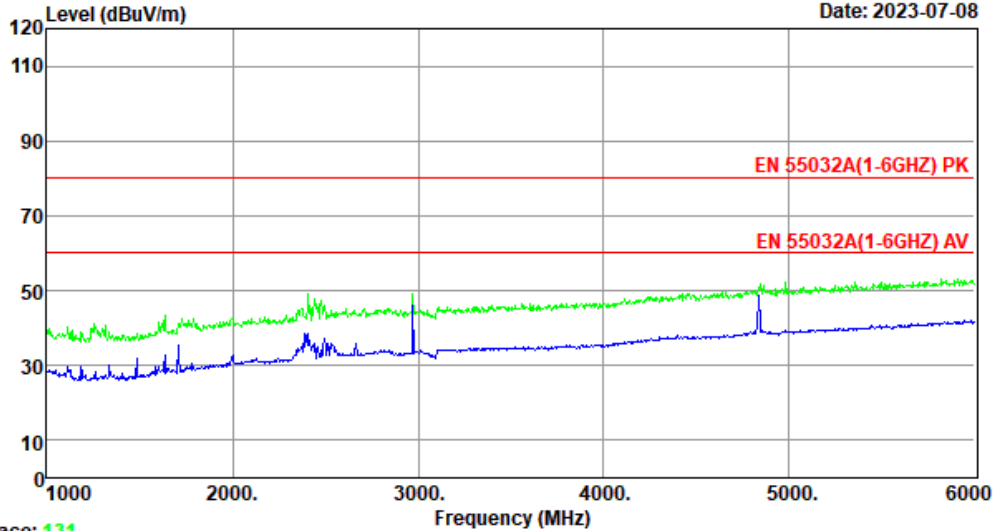



Trace: 131


Site no. : 1# 966 Chamber Data no. : 132  
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL  
Limit : EN 55032A(1-6GHZ) PK  
Env. / Ins. : Temp:24.6°C;Humi:52.6%;Press:101.82kPa  
Engineer : ZQL  
EUT : Embedded Industrial Computer  
Power : DC 12V From Battery  
M/N : CS10600R070E  
Test Mode : WiFi Mode

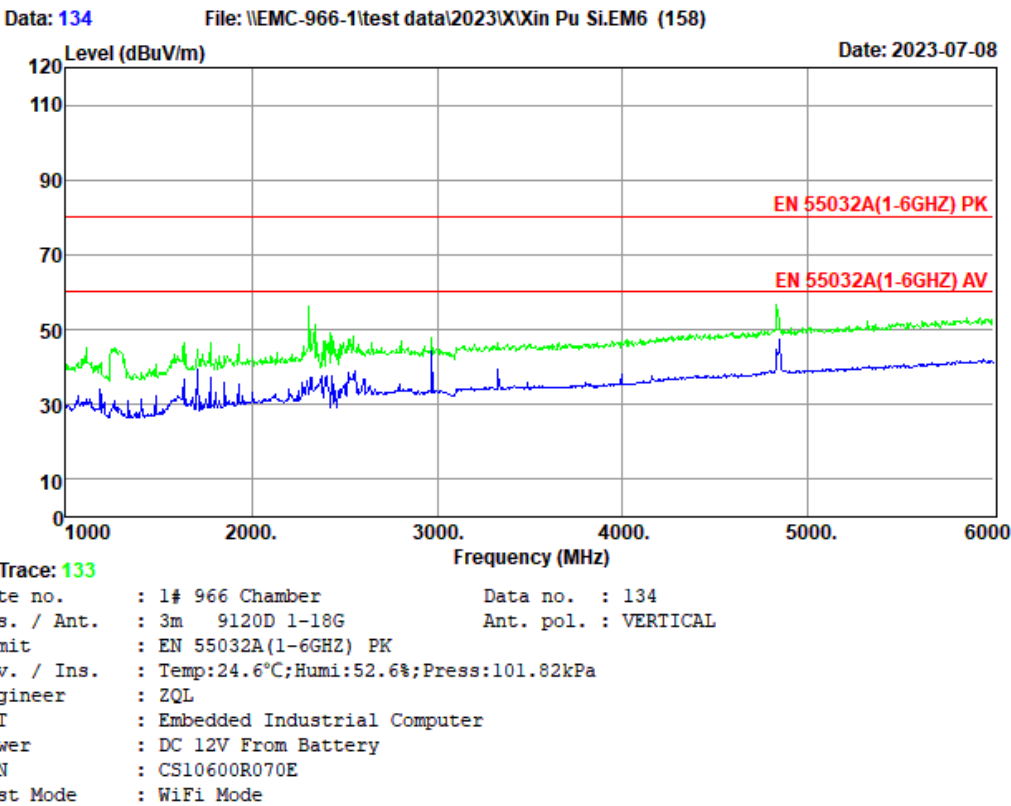

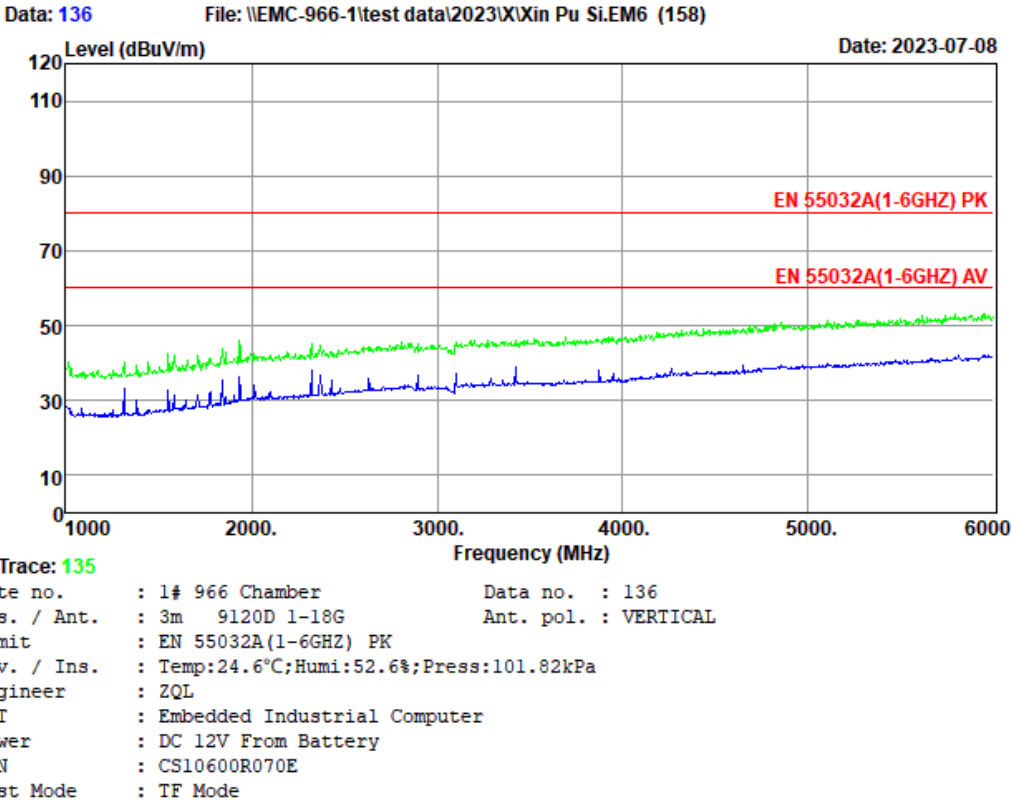

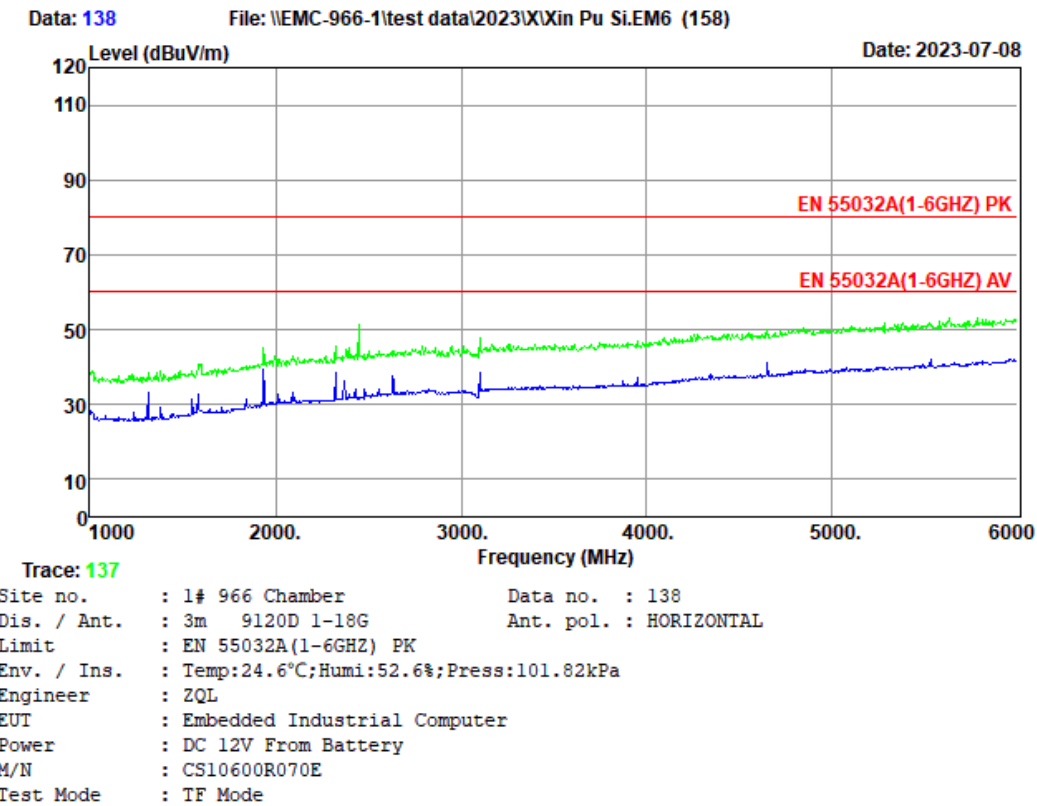

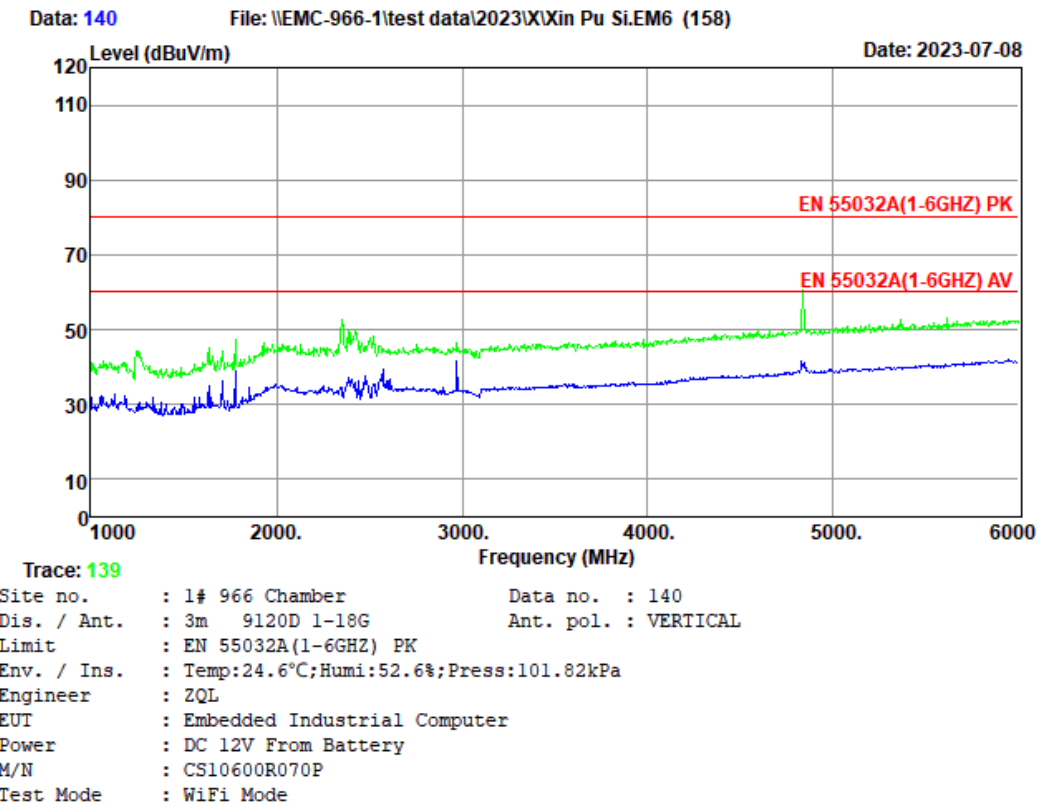


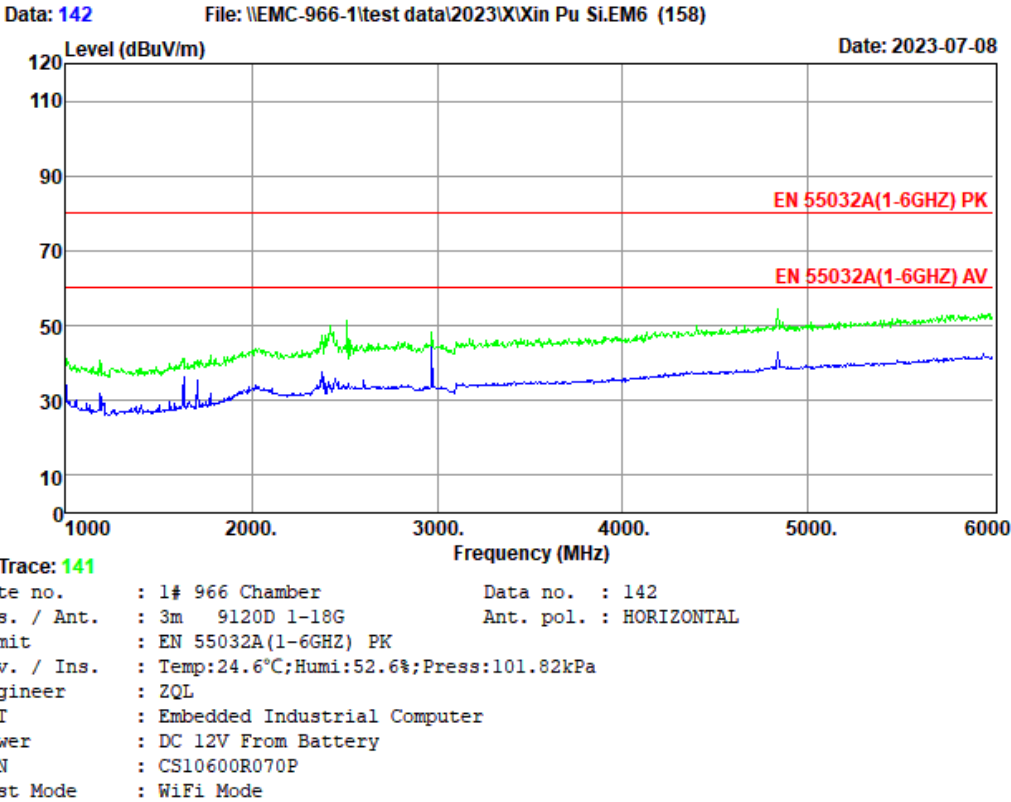

Data: 144

File: \\EMC-966-1\\test data\\2023\\X\\Xin Pu Si.EM6 (158)

Date: 2023-07-08

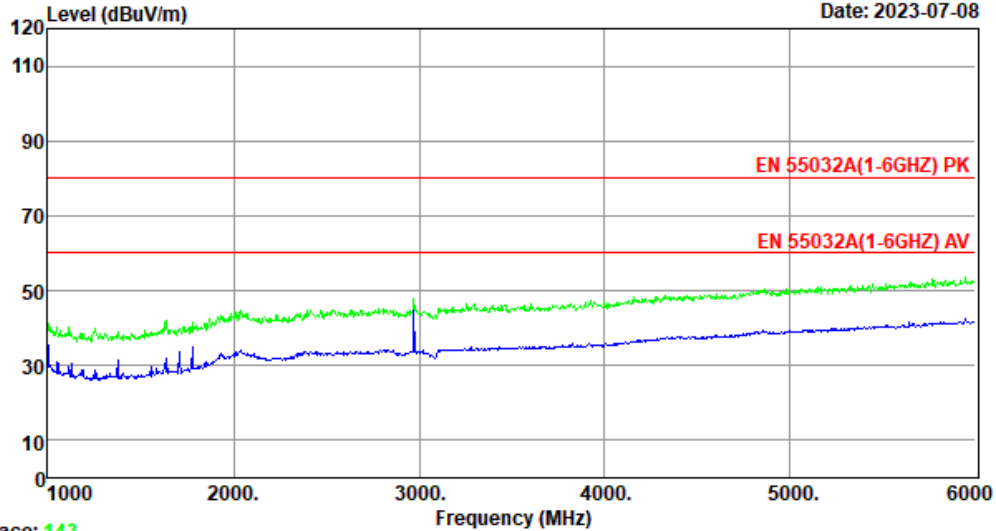

Trace: 143


Site no. : 1# 966 Chamber Data no. : 144  
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL  
Limit : EN 55032A(1-6GHZ) PK  
Env. / Ins. : Temp:24.6°C;Humi:52.6%;Press:101.82kPa  
Engineer : ZQL  
EUT : Embedded Industrial Computer  
Power : DC 12V From Battery  
M/N : CS10600R070P  
Test Mode : USB Play



Data: 146


File: \\EMC-966-1\\test data\\2023\\X\\Xin Pu Si.EM6 (158)


Date: 2023-07-08

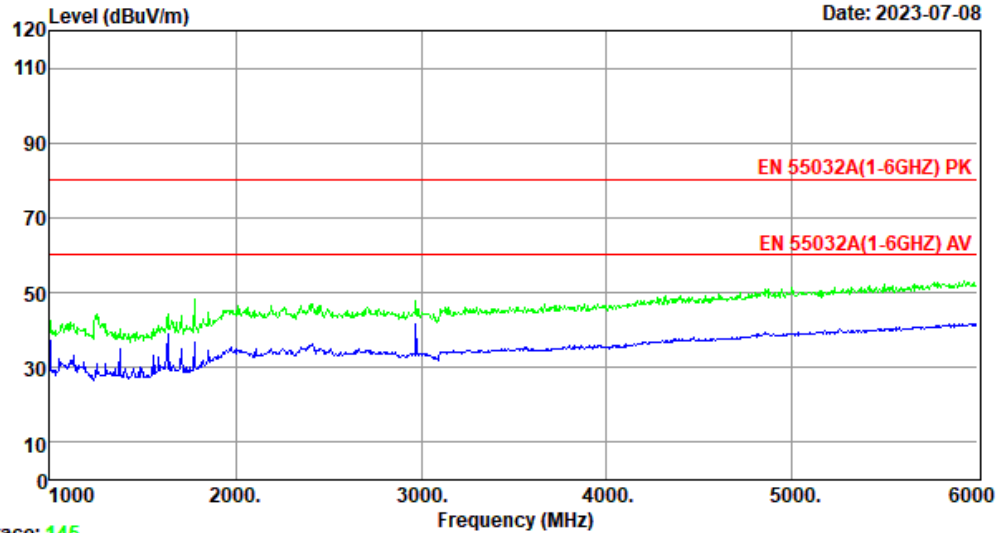



Trace: 145


Site no. : 1# 966 Chamber Data no. : 146  
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : VERTICAL  
Limit : EN 55032A(1-6GHZ) PK  
Env. / Ins. : Temp:24.6°C;Humi:52.6%;Press:101.82kPa  
Engineer : ZQL  
EUT : Embedded Industrial Computer  
Power : DC 12V From Battery  
M/N : CS10600R070P  
Test Mode : USB Play

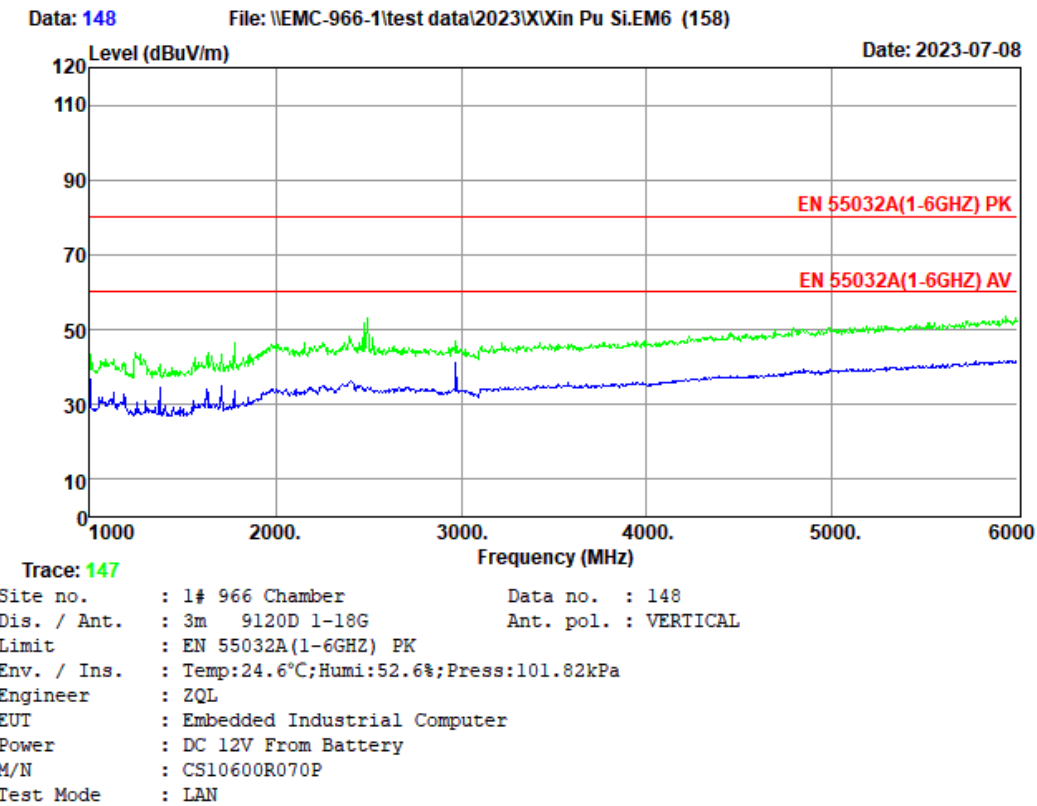


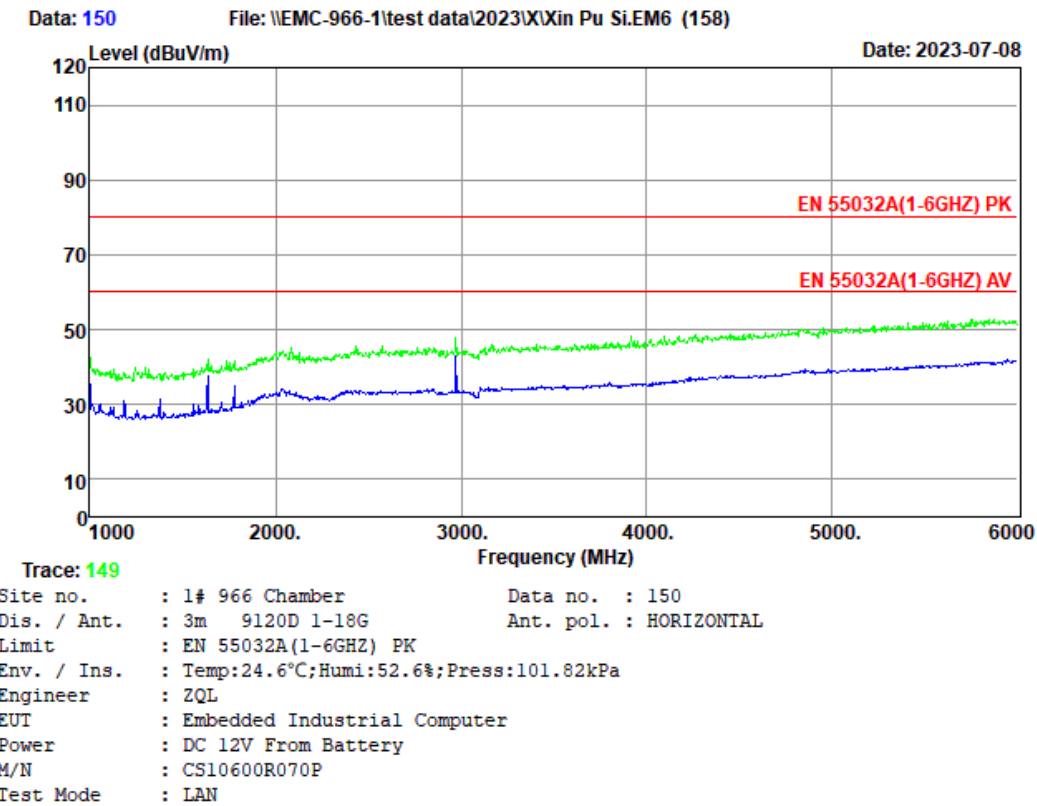

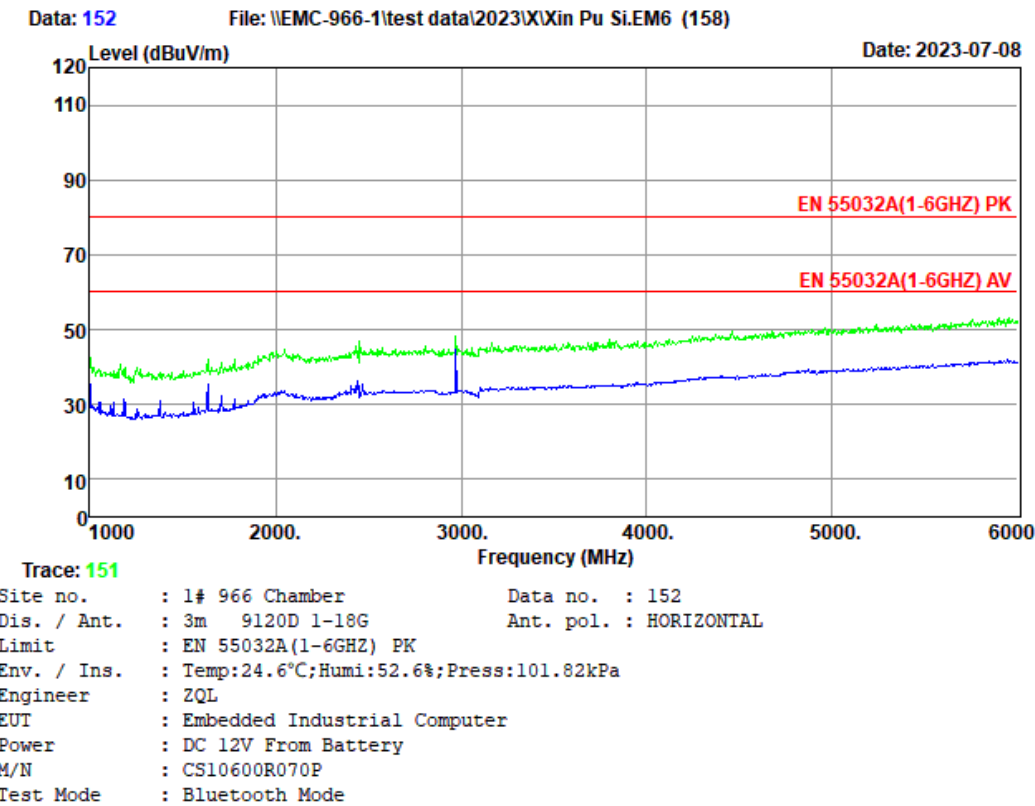

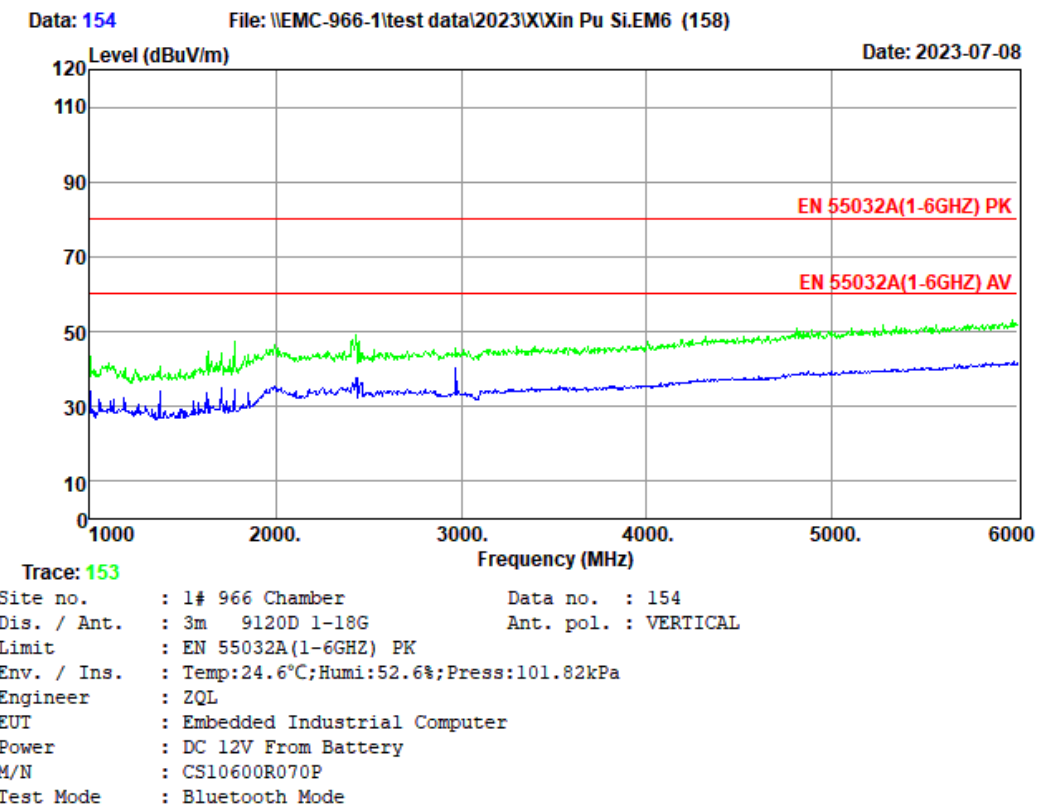

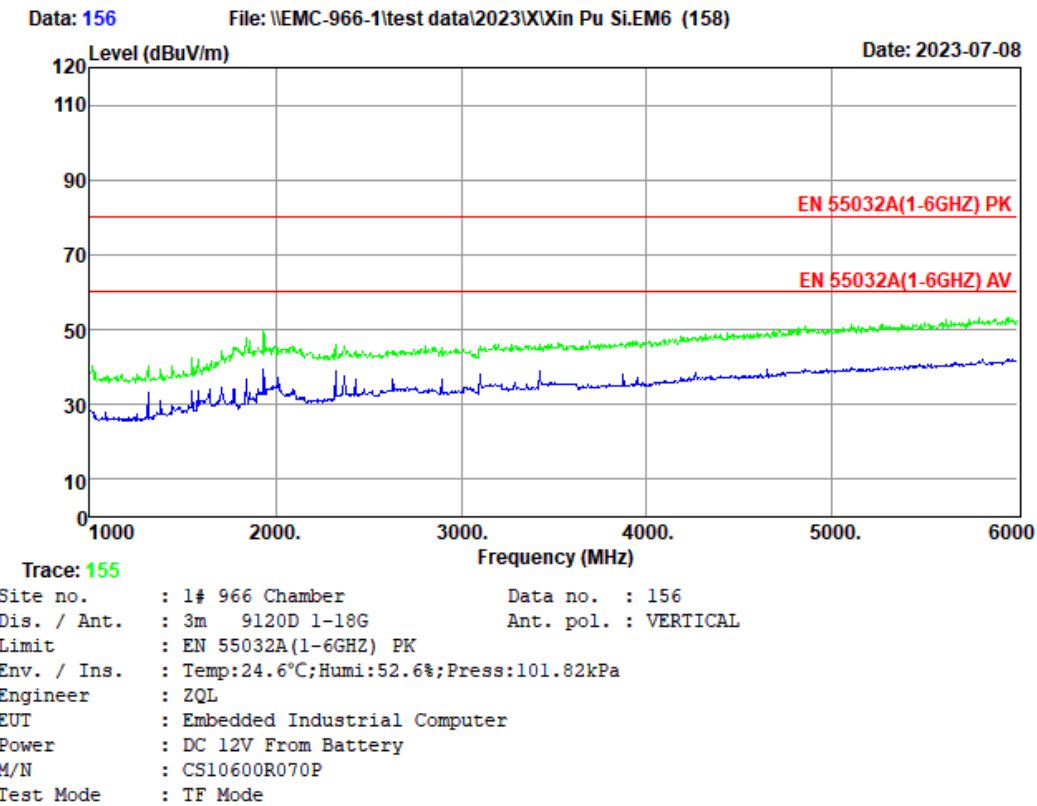

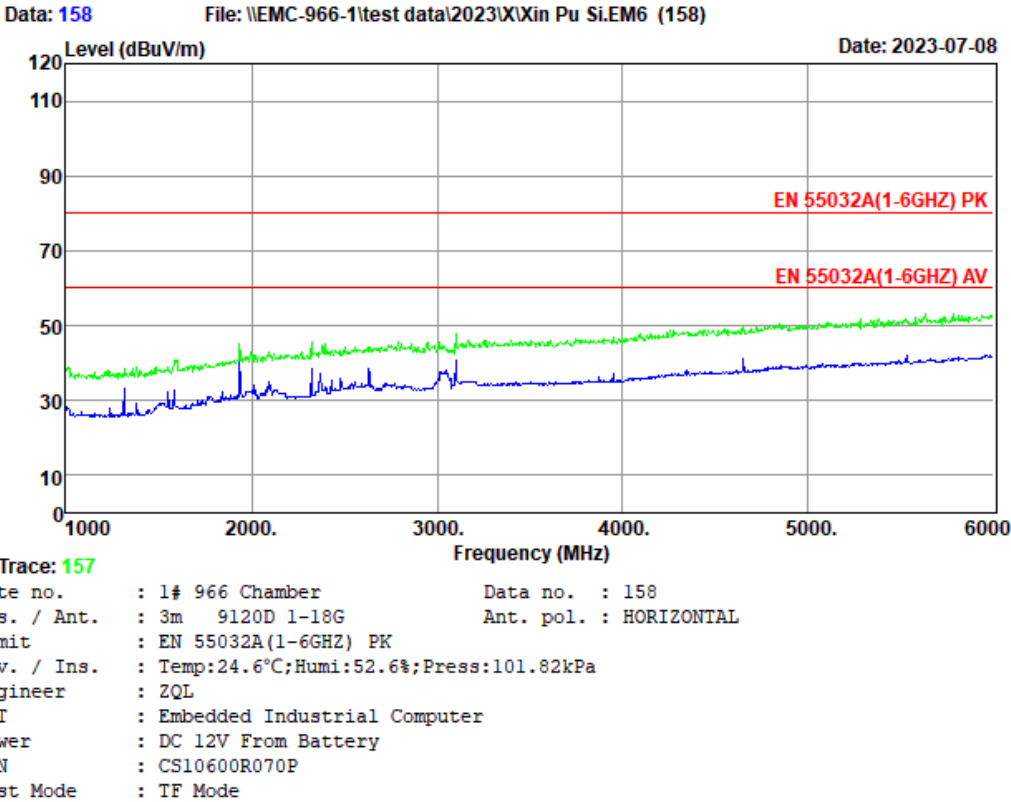

## 5. IMMUNITY TEST RESULT

### 5.1. Description of Performance Criteria:

#### Performance criteria A

The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

For audio output device: The measured acoustic interference ratio and/or the measured electrical interference during the test shall be -20dB or better(see note1)

#### Performance criteria B

During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test.

After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

#### Performance criteria C

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A reboot or re-start operation is allowed.

Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

**Note 1:** This performance criterion only using for Continuous inducted RF disturbances and Continuous RF electromagnetic field disturbances item.



## 5.2. Electrostatic Discharge Immunity Test

<b>RESULT</b>	<b>: Pass</b>
Test procedure	: EN 55035:2017+A11:2020
Basic standard	: EN 61000-4-2:2009
Test specification	: +/-4.0kV(Contact discharge) +/-8.0kV(Air discharge)
Number of discharges	: $\geq 10$ (Air discharge for single polarity discharge) $\geq 10$ (Contact discharge for single polarity discharge)
Polarity	: Positive/Negative
Performance criterion	: B

### Test Setup

Date of test	: Jul. 12, 2023
Model No.	: CS10600R070E, CS10600R070P
Input Voltage	: DC 12V From Battery
Operation Mode	: TF Mode, Wi-Fi, USB Play, Bluetooth Mode, LAN
Temperature	: 25°C
Humidity	: 44%
Pressure	: 101.20kPa

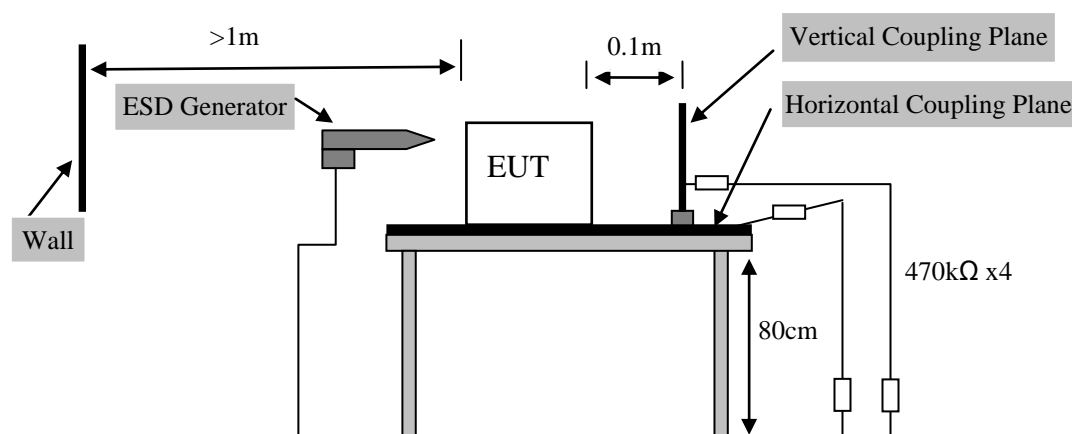


Table 1: Electrostatic Discharge Immunity Test Result

Discharge Location		Type of discharge	Result
HCP	4 points	Contact	Pass
VCP	4 points	Contact	Pass
USB	2 points	Contact	Pass
TYPE-C	1 point	Contact	Pass
HDMI	1 point	Contact	Pass
PHONE	2 points	Contact	Pass
Screen	4 points	Air	Pass
Slot	4 points	Air	Pass

*Remark: 1. The screen was flashing during the test, but self-recoverable after the test  
2. Discharge should be considered on Contact and Air and Horizontal Coupling Plane (HCP) and Vertical Coupling Plane (VCP).*

### 5.3. Radio Frequency Electromagnetic Field Immunity(R/S) Test

**RESULT** : **Pass**  
Test procedure : EN 55035:2017+A11:2020  
Basic standard : EN 61000-4-3:2006+A1:2008+A2:2010  
Frequency Range : 80-1000MHz,1800MHz, 2600MHz, 3500MHz, 5000MHz  
Performance criterion : A  
Test site : 866 Chamber

#### Test Setup


Date of test : Jul. 12, 2023  
Model No. : CS10600R070E, CS10600R070P  
Input Voltage : DC 12V From Battery  
Operation Mode : TF Mode, Wi-Fi, USB Play, Bluetooth Mode, LAN  
Temperature : 21.5°C  
Humidity : 52%  
Pressure : 101.20kPa

The EUT and its simulators were placed on a turn table which was 0.8 meter above the ground. The EUT was set 3 m away from the transmitting antenna which was mounted on an antenna tower. Both horizontal and vertical polarization of the antenna were set on test. Each of the four sides of EUT must be faced this transmitting antenna and measured individually.

In order to judge the EUT performance, a CCD camera was used to monitor EUT screen.

All the scanning conditions were as follows:

Condition of Test	Remarks
1. Field Strength	3 V/m (Severity Level 2)
2. Radiated Signal	Modulated
3. Scanning Frequency	80 - 1000 MHz
4. Sweeping time of radiated	0.0015 decade/s
5. Dwell Time	at least 3 seconds

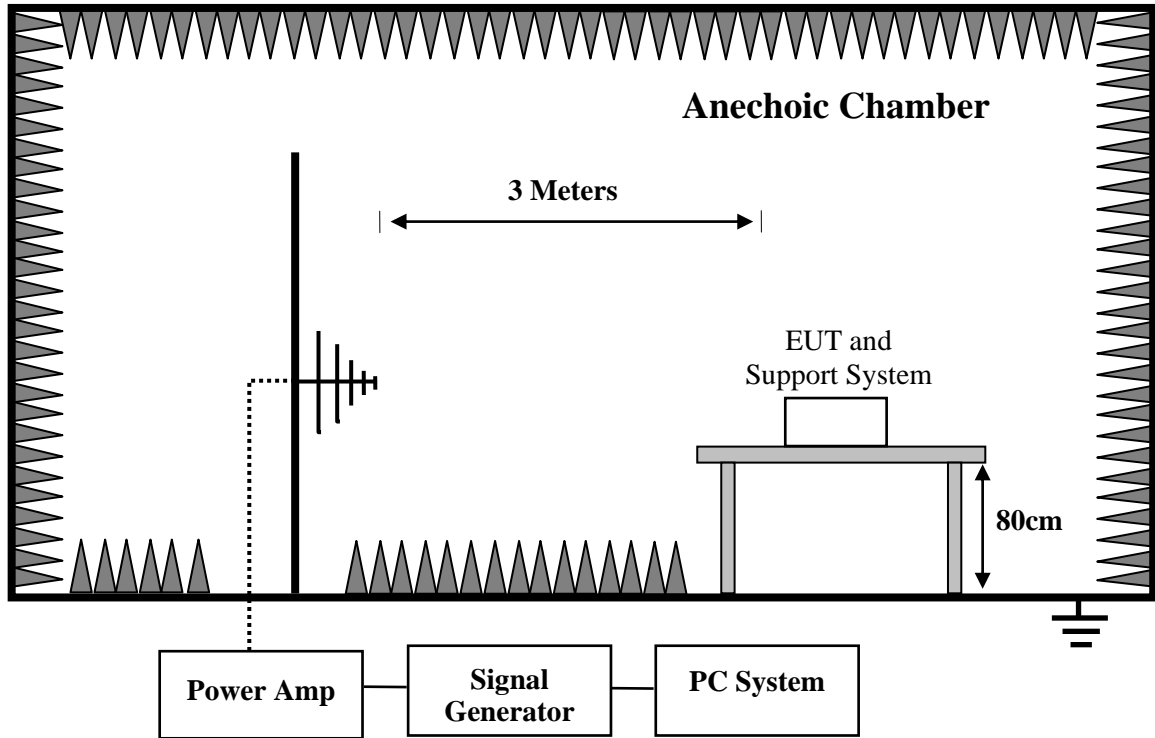

Condition of Test	Remarks
6. Field Strength	3 V/m (Severity Level 2)
7. Radiated Signal	Modulated
8. Scanning Frequency	1800MHz,2600MHz,3500MHz,5000MHz
9. Sweeping time of radiated	0.0015 decade/s
10. Dwell Time	at least 3 seconds

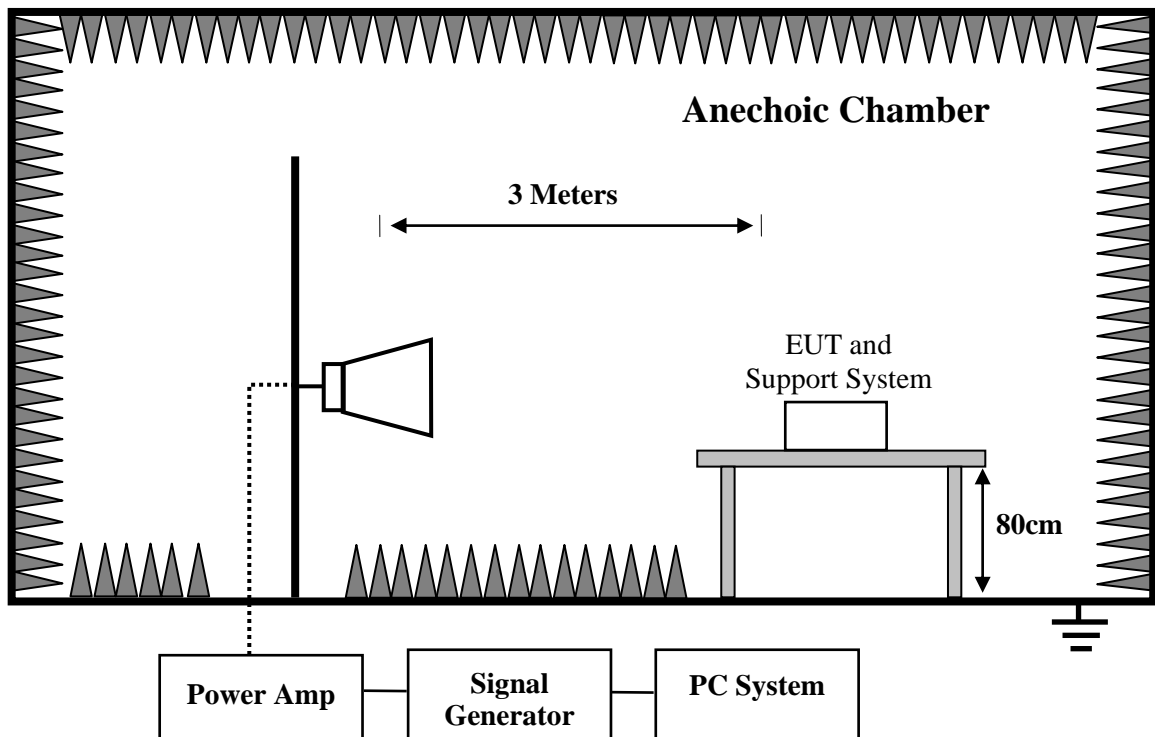


Table 2: Radio Frequency Electromagnetic Field Immunity Test Result

Field Strength (V/m)	Test Frequency (MHz)	Test mode	Polarization of antenna	Reference Level	Audio output	Limit	Interference Ratio (worst case)
3	80-1000MHz, 1800MHz, 2600MHz, 3500MHz, 5000MHz	TF Mode, Wi-Fi, USB Play, Bluetooth Mode, LAN	H	75dBSPL	Speaker	$\leq$ -20dB	-35 dB
			V	75dBSPL	Speaker		-43 dB

#### 5.4. Electrical Fast Transient/Burst Immunity Test

<b>RESULT</b>	<b>: Pass</b>
Test procedure	: EN 55035:2017+A11:2020
Basic standard	: EN 61000-4-4:2012
Pulseform	: $T_r/T_h = 5/50\text{ns}$
Repetition Frequency	: 5 kHz ; (100 kHz : only for single lines of xDSL equipment)
Test Duration	: 120s
Performance criterion	: B

##### Test Setup

Date of test	: Jul. 12, 2023
Model No.	: CS10600R070E, CS10600R070P
Input Voltage	: DC 12V From Battery
Operation Mode	: LAN
Temperature	: 22°C
Humidity	: 51%
Pressure	: 101.20kPa

The EUT and its simulators were placed 0.1 m high above the ground reference plane which was a minimum 2m\*2m metallic sheet with 0.65mm minimum thickness. This reference ground plane shall project beyond the EUT by at least 0.1 m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

##### 1. For power input port:

The EUT was connected to the power mains by using a coupling device which coupled the EFT interference signal to AC power lines. Both polarities of the test voltage were applied during compliance test and the duration of the test were 2mins.

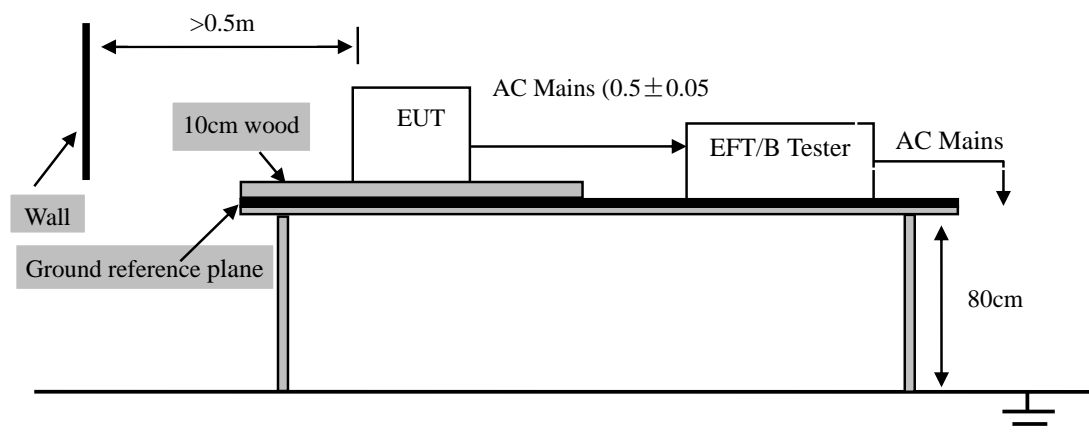


Table 5: Electrical Fast Transient/Burst Immunity Test Result

Coupling Ports	Coupling Voltage	Inject Method	Result
Signal Line	$\pm 0.5$ kV	Direct	Pass

*Remark: The screen was flashing during the test, but self-recoverable after the test*

## 5.5. Surge Immunity Test

**RESULT** : **Pass**  
Test procedure : EN 55035:2017+A11:2020  
Basic standard : EN 61000-4-5:2014  
Pulse form :  $T_r/T_d = 1.2/50\mu s$   
Test Duration : 60s  
Performance criterion : B

### Test Setup

Date of test : Jul. 12, 2023  
Model No. : CS10600R070E, CS10600R070P  
Input Voltage : DC 12V From Battery  
Operation Mode : LAN  
Temperature : 22°C  
Humidity : 51%  
Pressure : 101.20kPa

2 $\Omega$  effective output impedance of the generator was used for L-N test. 12 $\Omega$  effective output impedance of the generator was used for L-PE, N-PE test.

5 positive and 5 negative (polarity) tests were applied successively synchronized to the voltage phase 90°, 270° to L-N respectively. The repetition rate was 1 per minute during test.

#### 1. For input and AC power ports:

The EUT was connected to the power mains by using a coupling device which coupled the surge interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration was 1 minute.

#### 2. For signal lines and control lines ports:

None.

#### 3. For DC input and DC output power ports:

None.

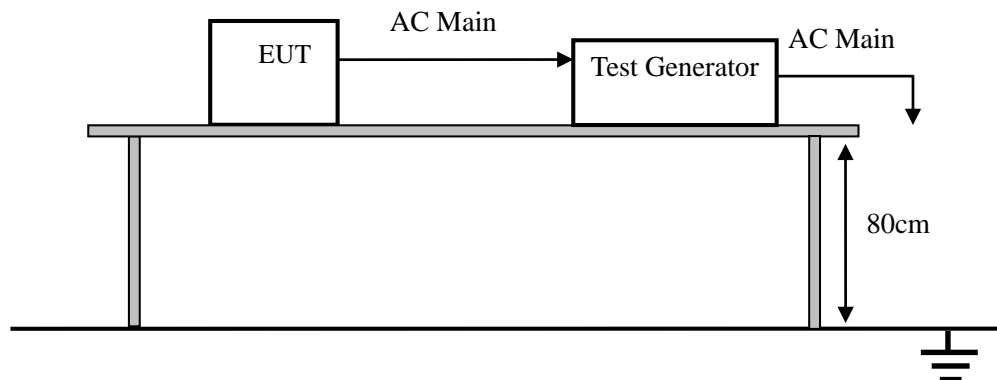




Table 4: Surge Immunity Test Result

Coupling Ports		Coupling Voltage	Coupling Phase / Result			
			0°	90°	180°	270°
AC power ports	Signal-Signal	+/-0.5kV Direct	Pass			
	Signal -PE	+/-0.5kV Direct	Pass			

*Remark: The screen was flashing during the test, but self-recoverable after the test*

## 5.6. Injected Currents Susceptibility Test

**RESULT** : **Pass**

Test procedure : EN 55035:2017+A11:2020

Basic standard : EN 61000-4-6:2014

Test specification : 3 Vr.m.s, 3 Vr.m.s - 1Vr.m.s, 1Vr.m.s,  
AM 80%, 0.15 MHz - 10 MHz, 10 MHz – 30 MHz,  
30 MHz – 80MHz

Performance criterion : A

### Test Setup

Date of test : Jul. 12, 2023

Model No. : CS10600R070E, CS10600R070P

Input Voltage : DC 12V From Battery

Operation Mode : LAN

Temperature : 22.5°C

Humidity : 56%

Pressure : 101.20kPa

The EUT were placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) was placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT were as short as possible, and their height above the ground reference plane were between 30 and 50 mm (where possible).

The frequency range was swept from 0.15 MHz - 10 MHz, 10 MHz – 30 MHz and 30 MHz – 80MHz using 3V, 3 V - 1V, 1V signal level, and with the disturbance signal 80% amplitude modulated with a 1KHz sine wave.

The rate of sweep shall not exceed  $1.5 \times 10^{-3}$  decades/s. Where the frequency was swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.

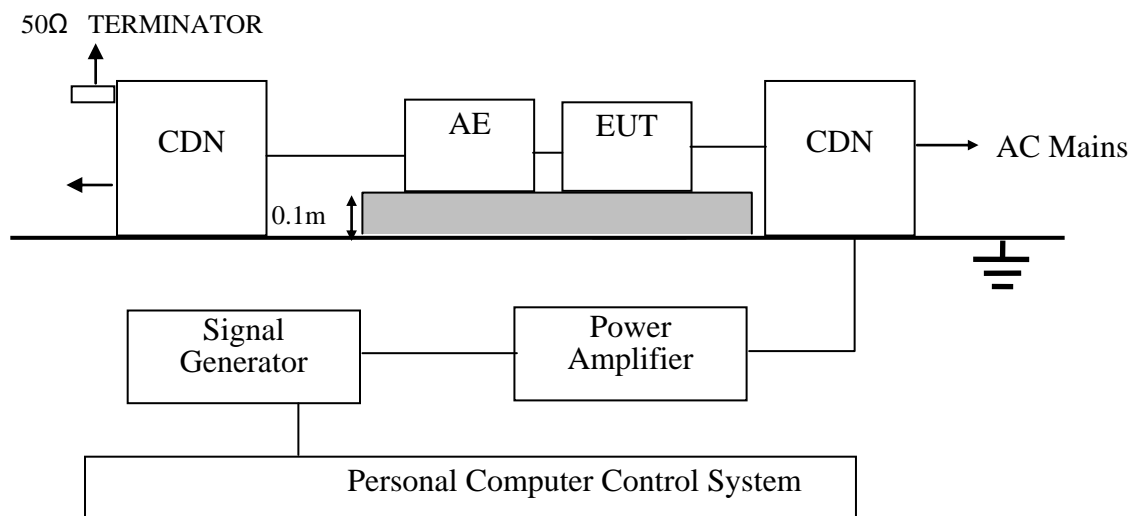


Table 5: Injected Currents Susceptibility Test Result

Voltage (V)	Test Frequency (MHz)	Test mode	Injection Method	Reference Level	Audio output	Limit	Interference Ratio (worst case)
3	0.15 –10 MHz	LAN	CDN-M2	75dBSPL	Speaker	$\leq$ -20dB	-28 dB
3 -1	10 –30 MHz						-35 dB
1	30 –80 MHz						-41 dB

## 5.7. Power Frequency Magnetic Field Immunity Test

**RESULT** : **Pass**  
Test procedure : EN 55035:2017+A11:2020  
Basic standard : EN 61000-4-8:2010  
Test specification : 1 A/m  
Performance criterion : A

### Test Setup

Date of test : Jul. 12, 2023  
Model No. : CS10600R070E, CS10600R070P  
Input Voltage : DC 12V From Battery  
Operation Mode : TF Mode, Wi-Fi, USB Play, Bluetooth Mode, LAN  
Temperature : 24°C  
Humidity : 59%  
Pressure : 101.20kPa

The EUT was subjected to the test magnetic field by using the induction coil of standard dimensions (1m\*1m). The induction coil then was rotated by 90° in order to expose the EUT to the test field with different orientations.

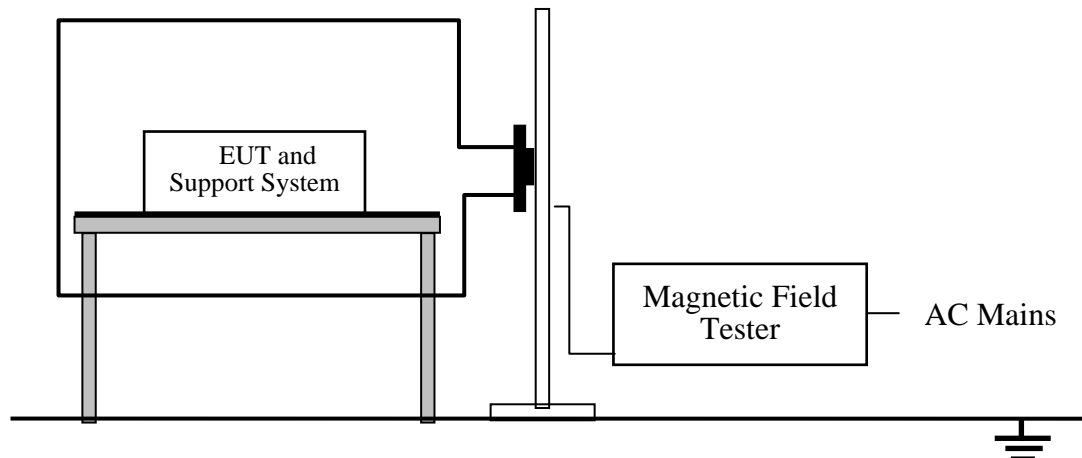



Table 6: Power Frequency Magnetic Field Immunity Test Result

Test Level	Testing Duration	Coil Orientation	Criterion	Result
1A/m	5 mins	X	A	Pass
1A/m	5 mins	Y	A	Pass
1A/m	5 mins	Z	A	Pass



*Remark: There was no change compared with initial operation during the test*

## 6. PHOTOGRAPHS OF TEST SET-UP

### 6.1.Set-up for Asymmetric Mode Conducted Emissions Test


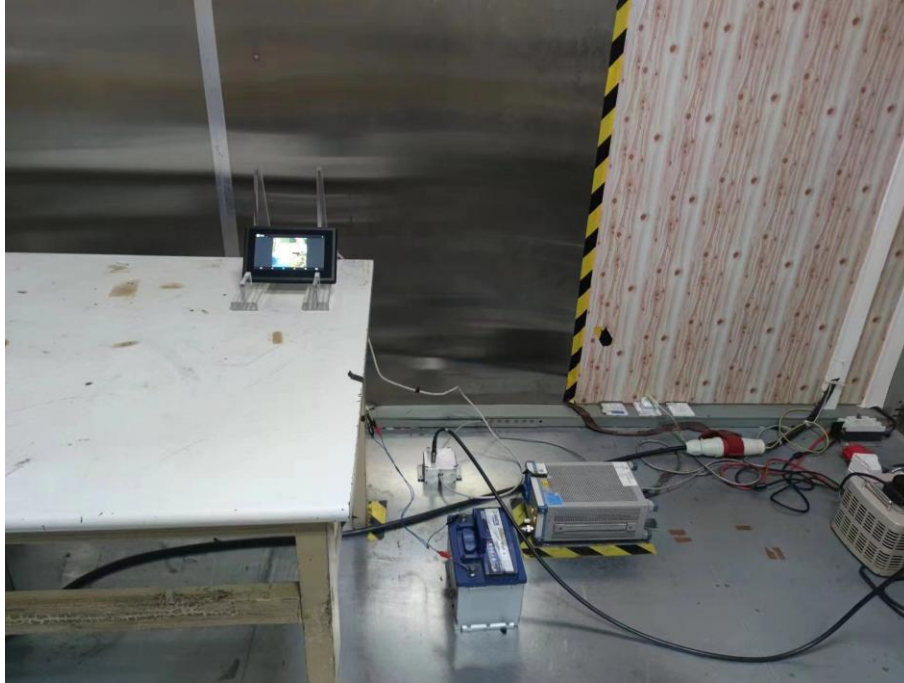


## 6.2.Set-up for Radiated Emission Test

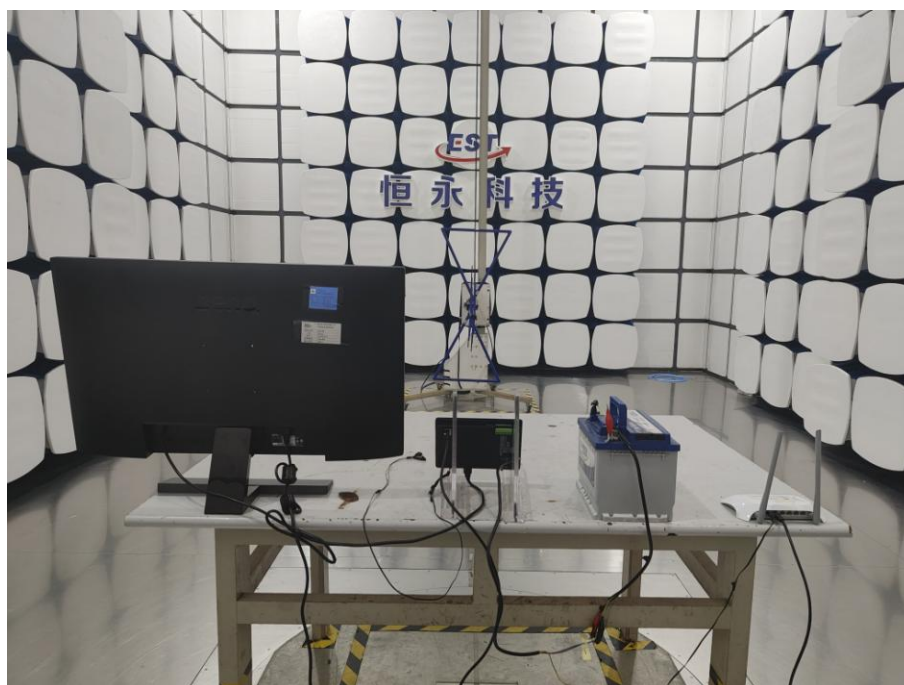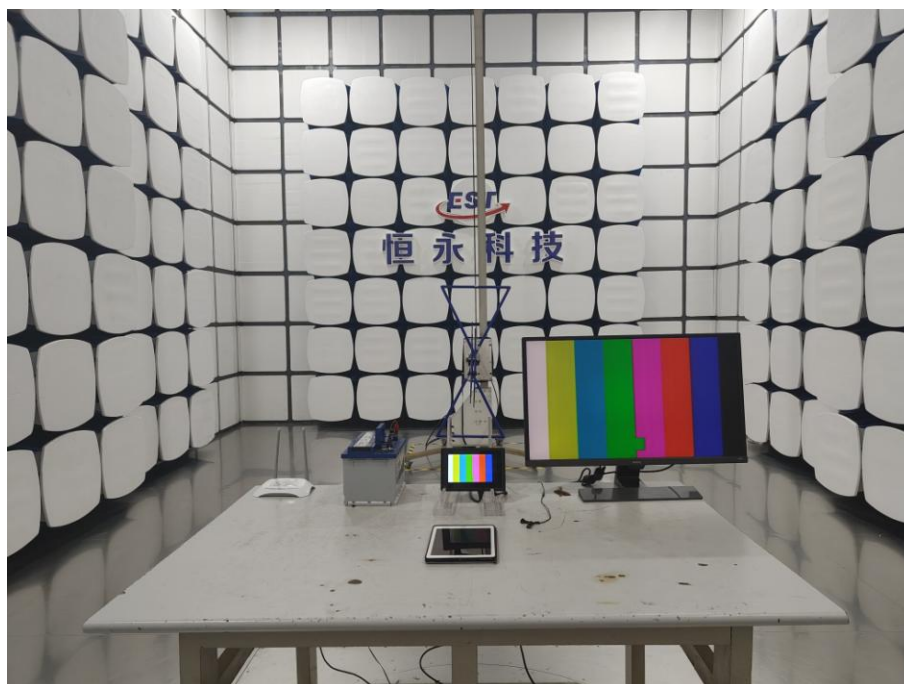





### 6.3.Set-up for Radiated Emission Test(above 1GHz)

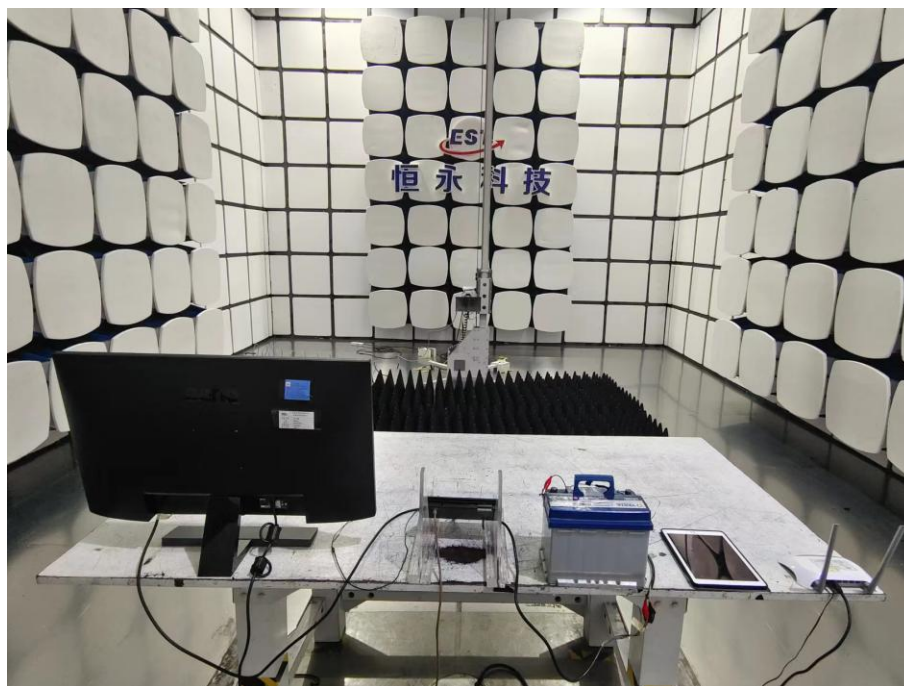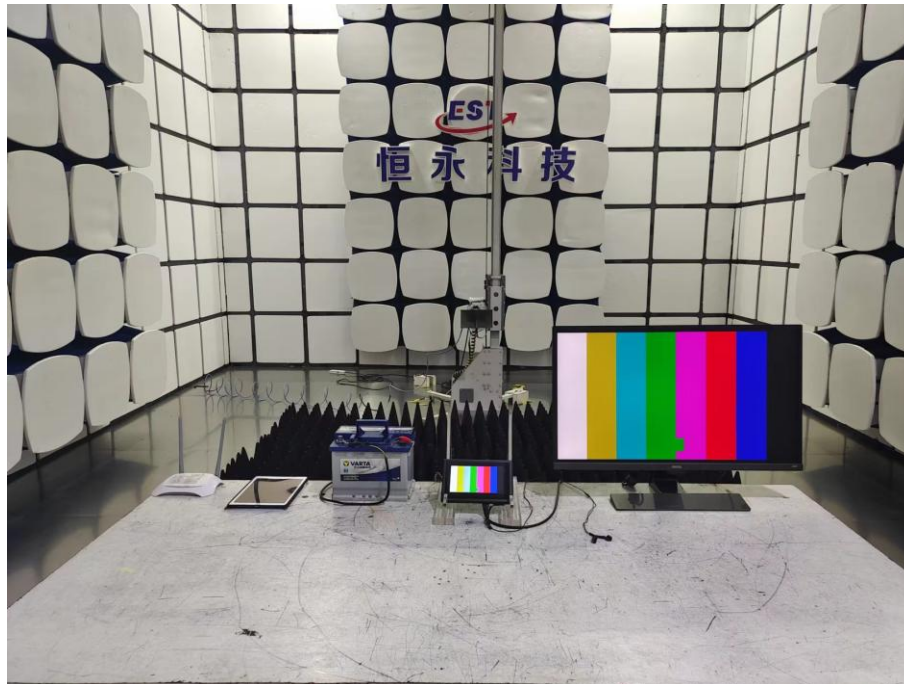

#### 6.4.Set-up for Electrostatic Discharge Immunity Test

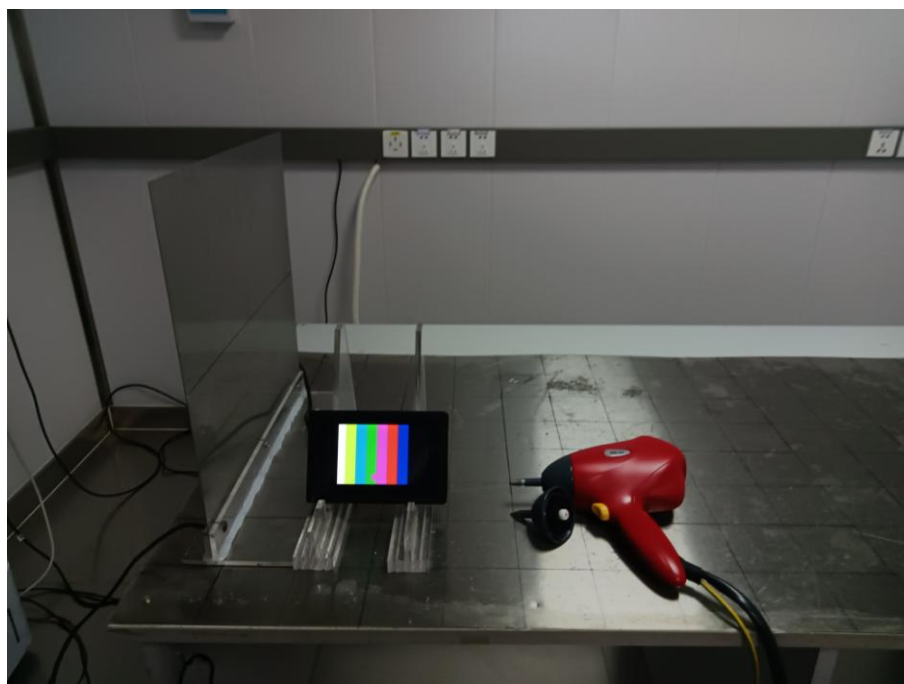


#### 6.5.Set-up for Radio Frequency Electromagnetic Field Immunity(R/S) Test

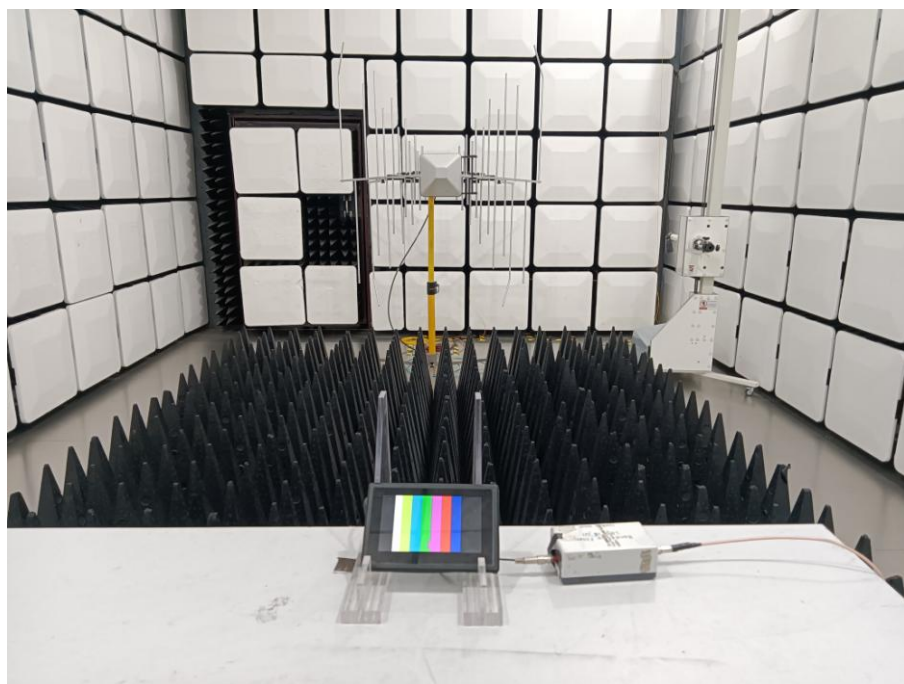




## 6.6.Set-up for Electrical Fast Transient/Burst Immunity Test

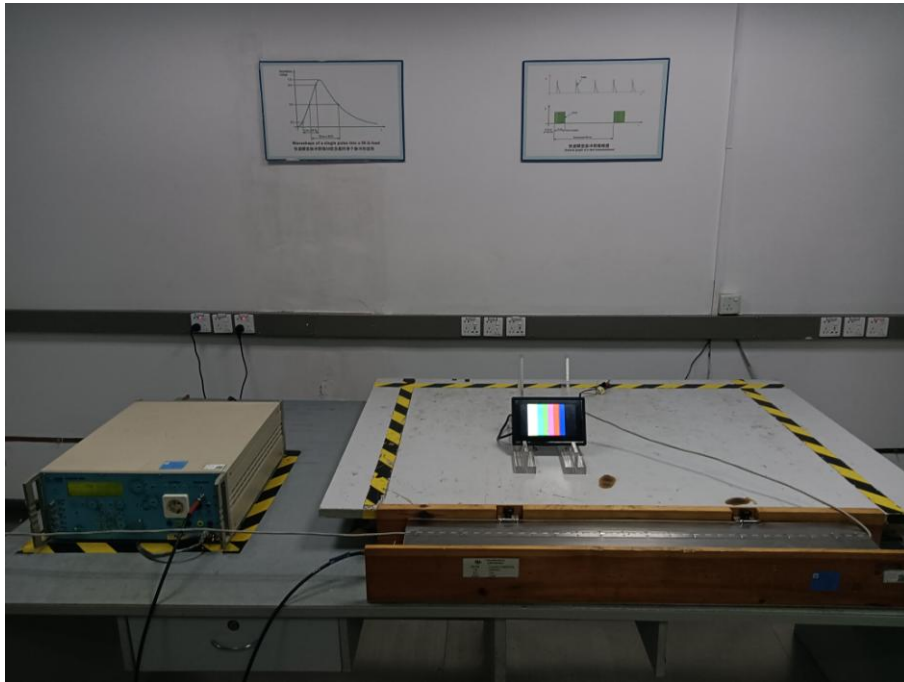


## 6.7.Set-up for Surge Immunity Test



## 6.8.Set-up for Power Frequency Magnetic Field Immunity Test

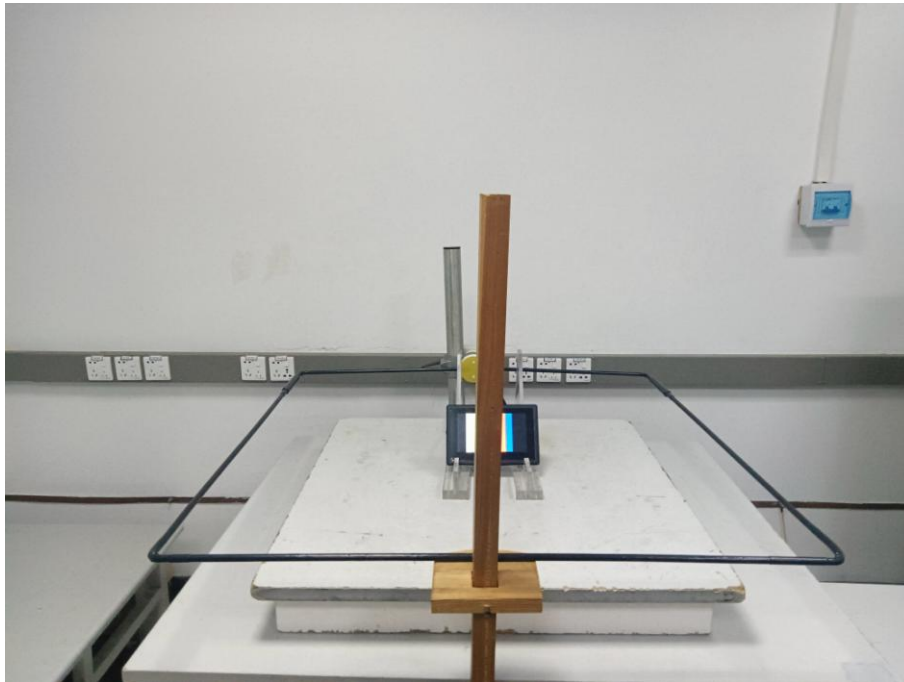

## 6.9.Set-up for Injected Currents Susceptibility Test

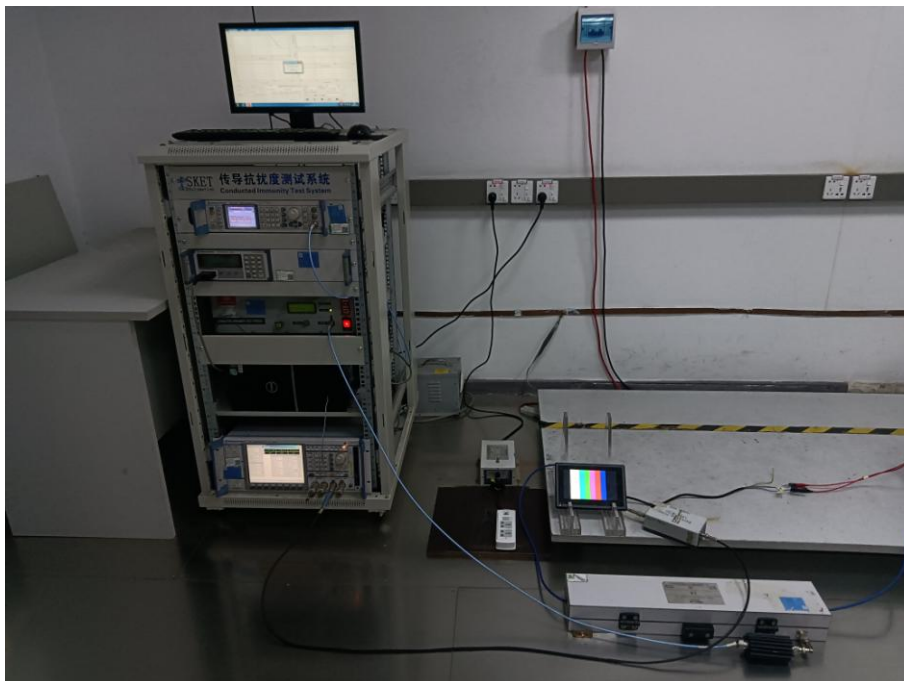

## 7. PHOTOGRAPHS OF THE EUT

M/N: CS10600R070P

Figure 1

General Appearance of the EUT



Figure 2

General Appearance of the EUT






**Figure 3**  
**General Appearance of the EUT**




**Figure 4**  
**Inside View of the EUT**



**Figure 5**  
**Inside View of the EUT**

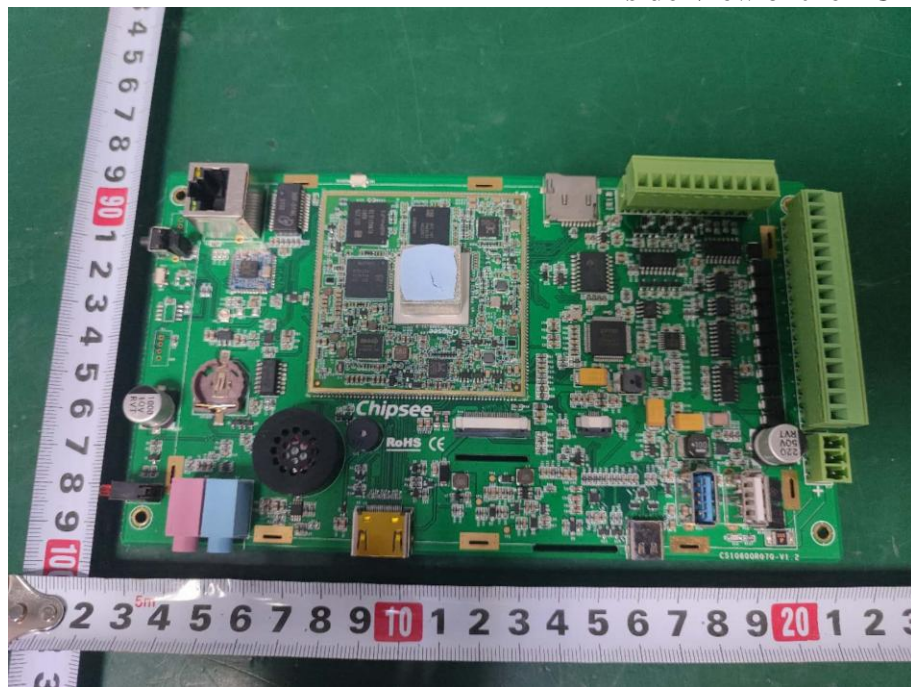

**Figure 6**  
**Inside View of the EUT**

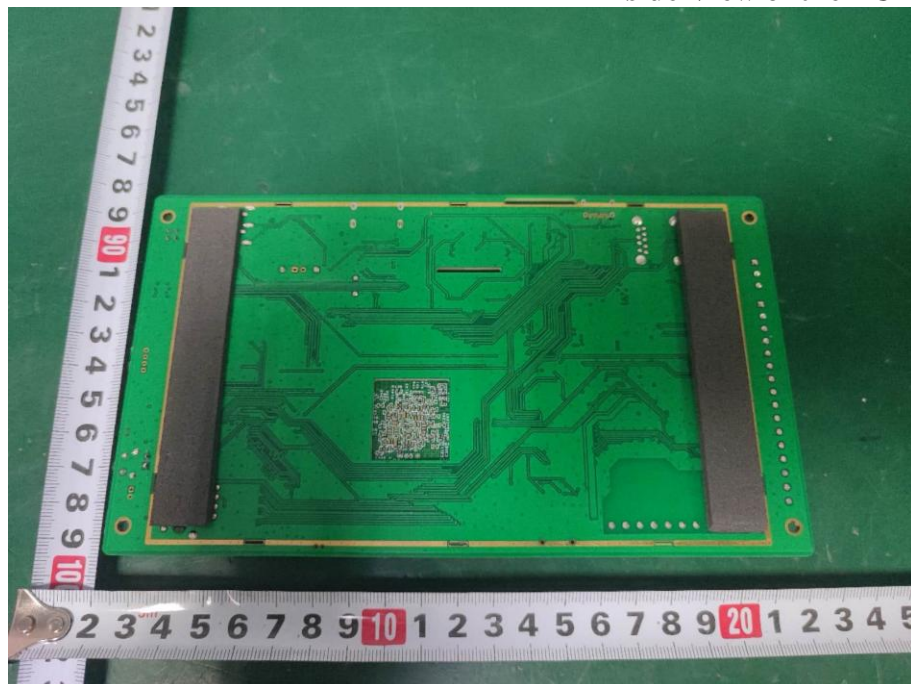


M/N: CS10600R070E

Figure 7  
General Appearance of the EUT




Figure 8  
General Appearance of the EUT

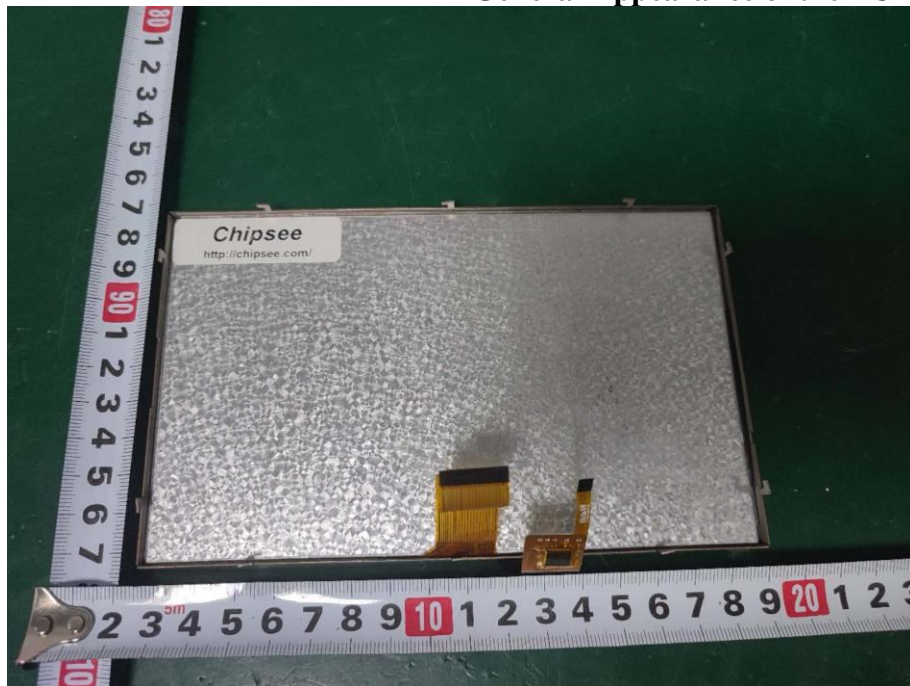




**Figure 9**  
**General Appearance of the EUT**

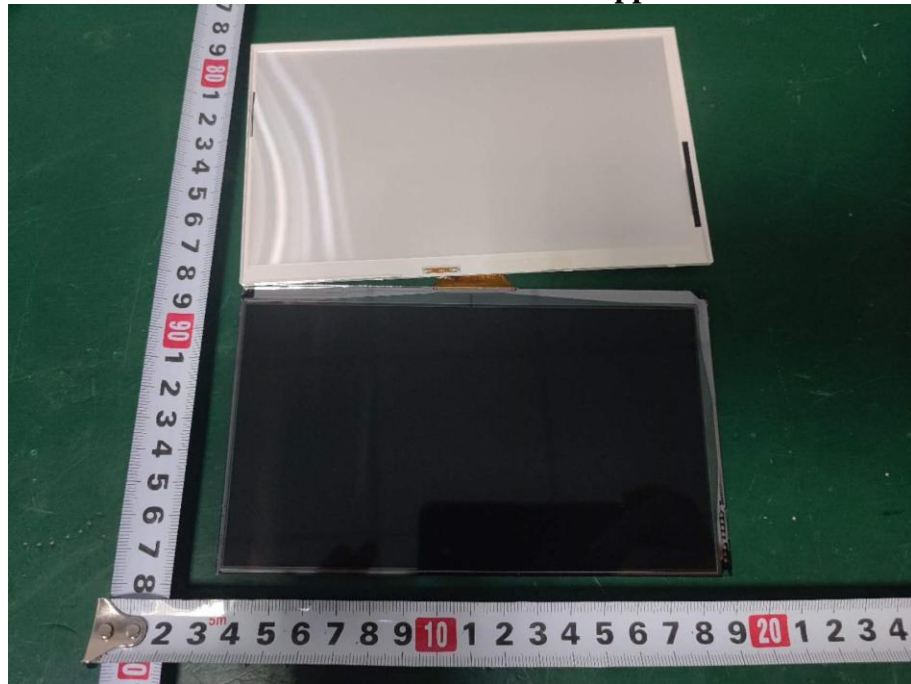


**Figure 10**  
**Inside View of the EUT**

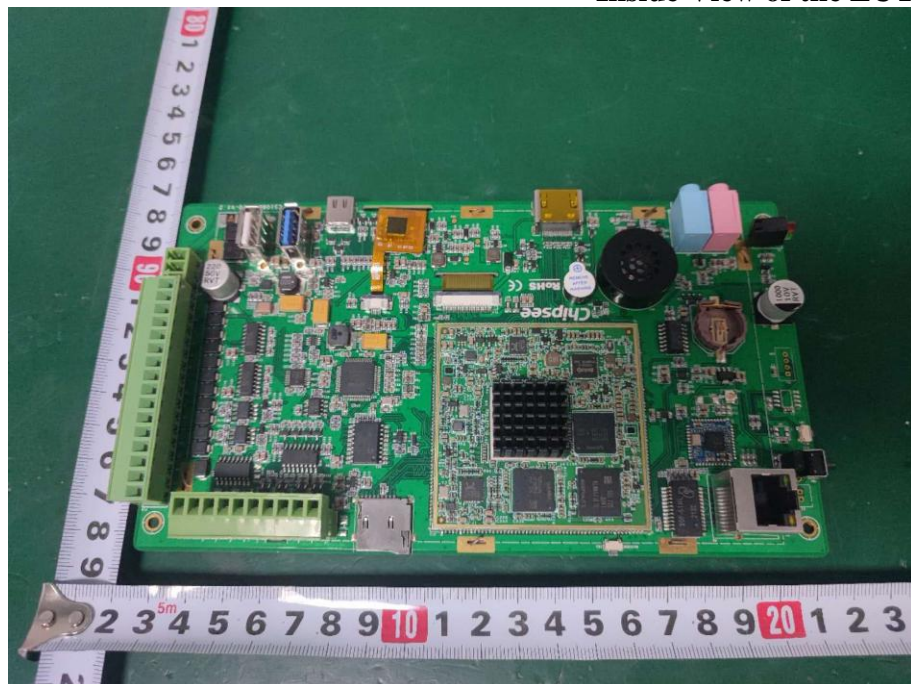

**Figure 11**  
**Inside View of the EUT**



**Figure 12**  
**Inside View of the EUT**

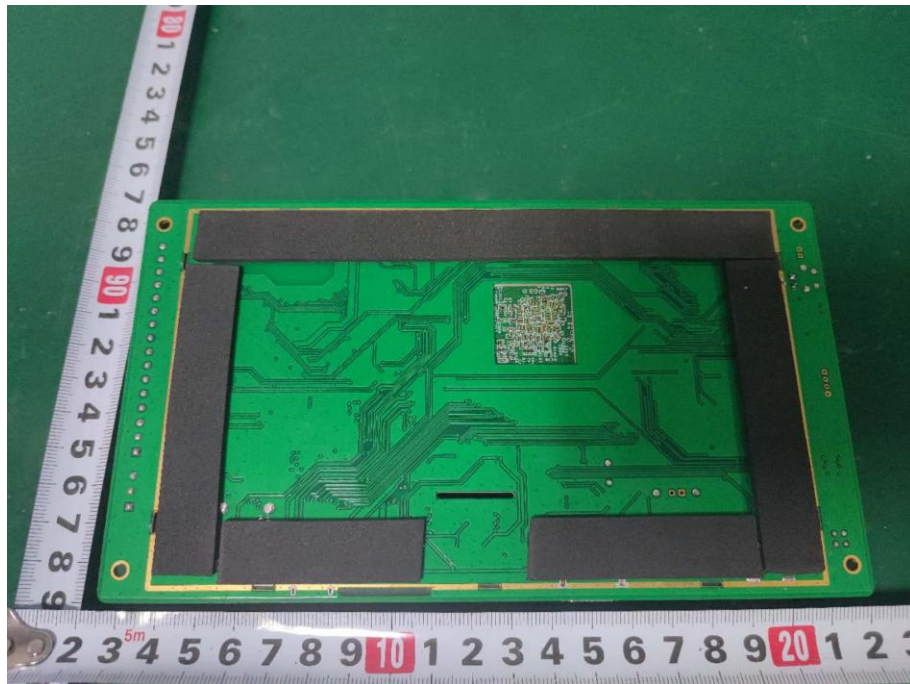

**End of Test Report**