PIM-236-C

Industrial Monitor

Chipsee Industrial Monitors are a solid and durable solution for all types of environments. Manufacturing, commercial, or industrial.



PIM-236-C (PN CS-D236) is a 23.6" industrial display that features a **10-point capacitive touchscreen**. The 3mm tempered glass cover with black silk-screen ensures that the screen is water and steam resistant.


The typical power consumption is 16W, while in standby mode CS-D236 uses around 2W, making it ideal for all kinds of applications.



www.chipsee.com contact@chipsee.com Phone: +8610-62105170

PIM-236-C

Mechanical dimensions:

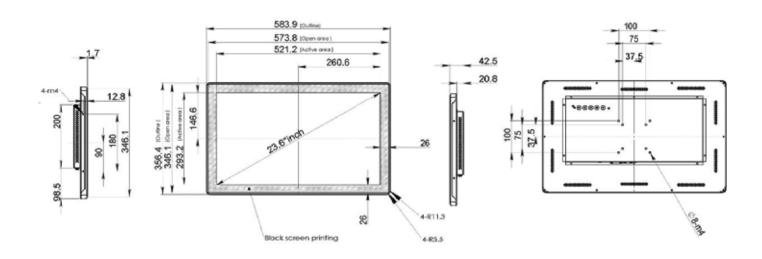

Product Features:

Display size (inch.)	23.6"	Waterproof	Touch surfaces will
Brightness (cd/m²)	250		not be affected by
Resolution	1920*1080		water droplets or
Touch Screen	10-Point Capacitive		steam
Contrast Ratio	3000:1	Calibration	No Calibration Tool
Viewing Angle	Horizontal: 178° / Vertical: 178°	Touch Screen connection	USB2.0(Type-B)
Color Depth	16.2M	Multi Touch Protocol Support	Windows
Refresh Frequency	60Hz	Hanging Method	VESA,MIS-D,100,C
Wired connectivity	1x DVI, 1x HDMI, 1x VGA	Power Input	DC 12V3A (50/60 Hz)
OSD Control	Button	Power Supply	≤ 16W (typ.)
OSD Language	English, Chinese	Standby Power	≤ 2W (typ.)
Glass	3mm Tempered Glass with	Work Environment	0°C~ 40°C,90% RH
	Black Silk-screen	Storage Environment	-20°C~60°C,90% RH
Touch Technology	Projecting Capacitance (G+G)	Accessories	Bracket /Power Line
Type of Pen	Fingers, Hands with		/VGA Line/USB Line/
	Gloves, Conductive		Power Adapter
	Stylus		

Chipsee www.chipsee.com Distributor